Theses and Dissertations   1. Thesis and Dissertation Collection, all items

1975

Maneuverable penetration system for horizontal exploration in soft ground [pt.2]

Katz, Alan William

Monterey, California. Naval Postgraduate School

http://hdl.handle.net/10945/20932

MANEUVERABLE PENETRATION SYSTEM
FOR HORIZONTAL EXPLORATION IN SOFT GROUND

[pt.2]

Alan William Katz

[pT. 2]

MANEUVERABLE PENETRATION SYSTEM
FOR HORIZONTAL EXPLORATION IN SOFT GROUND

by

ALAN WILLIAM KATZ
SB, United States Naval Academy
(1970)

Submitted in partial fulfillment

of the requirements for the degree of

Master of Science in Civil Engineering

at the

Massachusetts Institute of Technology
June 1975

CHAPTER 5

CONCLUSION

Two basic horizontal maneuverable penetration
systems(MPS) are presently available, which can be
modified for soft ground exploration. The mandrel
MPS consists of a Dyna-Drill downhole hydraulic motor,
bent or articulated sub, drill pipe, a conventional
diamond or tricone bit, and various miscellaneous
surface support equipment. The thrust applicator MPS
is built around a DRILCO thrust applicator and
includes: a Century Electric or a W. H. Nichols
hydraulic drill motor; a conventional drag or tricone
drill bit; a CONOCO deflection shoe, orientating
motor, and downhole hydraulic valving system; and the
necessary embilical cables interconnecting the thrust
applicator with the required surface support systems.
Both of the MPS's contain module spaces for an elec-
tronic navigation package and various geotechnical
and geophysical sensing devices.

Within the framework of these two basic
approaches four MPS's have been proposed to operate
in four selected urban environments.

166

Tables 3.8 and 4.1 are repeated here for convenience
and will be referred to as Tables 5.1 and 5.2,
respectively, throughout the following discussion.
Selection A and B, in Table 5.1, will operate well
in a stiff clay or dense sand out to 1600 ft(488 m)
horizontally, while only Selection A will extend out
to 700 ft(214 m) in soft clay or loose sand.
In order to drill a greater distance a washover drill
pipe is required to reduce the soil friction.
Selection B's own weight hinders its directional con-
trol capability in soft clay. Both of these mandrel
MPS's would be expected to perform satisfactorily in
a residual soil if pebble size particles did not
clog the drill bit or lodge between the drill body and
hole wall. The minimum, continuous radius of curva-
ture for the mandrel MPS is associated with a build
angle of $12^{\circ}/100$ ft in stiff clay or dense sand
while in soft clay or loose sand it drops to $9^{\circ}/100$ ft
as shown in Table 5.2. The maximum "kink" radius of
curvature for the mandrel MPS is measured at an
associated build angle of $26^{\circ}/100$ ft.

The 5-3/4 in(14.6 cm) DRILCO thrust applicator,
with modified anchor pads (1-1/2 x 8 in(3.8 x 20.3 cm))
was basic to the two thrust applicator MPS's which
were analyzed as Selections C and D in Table 5.1.
Either the Century Electric motor or the W. H. Nichols

Table 5.1   Final Design Selections

Selec'n	A	B	C	D
Drill Motor	Dyna-Drill	Dyna-Drill	Nichols Hyd. Motor	Century Electric Motor
Drill Motor O.D. (in)	2-3/8	6-1/2	5	3-11/16
Length (ft)	7	19.6	4	4.5
Normal Force Device (NFD)	Drill Pipe	Thrust Appl. Drill Pipe	Thrust Appl.	Thrust Appl.
NFD O.D. (in)	2-3/8	8(T.A.) 4-1/2 (D.P.)	5-3/4 or 8	5-3/4 or 8
Direction Control	Bent Sub	Def.Shoe (T.A.) Bent Sub (D.P.)	Def. Shoe	Def. Shoe
Bit Type	Diamond or Drag	Tricone	Tricone	Tricone
Hole Dia. (in)	4-1/2	12	7	7
Comments	Excellent annulus size low flow rate, high torque	Max. annular size, max. torque RPM, high flow rate can be a problem	Opt. annular space, short length high torque low flow	Opt. annular space, min. flow requirements, short length, problem w/shorting

Table 5.2 Radius of Curvature for the MPS

	Radius of Curvature in Stiff Clay, Dense Sand (System limited) (ft)	Radius of Curvature in Soft Clay, Loose Sand (Formation limited) (ft)	Minimum Horizontal Distance (Vertical Entry) (ft)		Comments
			Stiff	Soft	
Mandrel	1145(5°/100') to 216(26°/100') Opt: 475(12°/100')	1145(5°/100') to 570(20°/100') Opt: 635(90°/100')	475	647	1) The system limit is based on the wear factor during bending of the rubber stator in the Dyna-Drill.
Thrust Appl.	1145(5°/100') to 380(15°/100') Opt: 715(8°/100')	1145(5°/100') to 380(15°/100') Opt: 715(8°/100')	715		1) The system limit is based on the minimum allowable deflection from bending which the thruster cylinder spline can withstand. 2) The soft ground limits are based on the ability of the thruster to develop thrust in this environment.

hydraulic motor perform equally well as drilling motors. The thrust applicator MPS was found to theoretically perform well in a stiff clay or dense sand while being capable of operating at depths up to 500 ft(153 m) and out to a horizontal distance of 5000 ft(1525 m). However, based on theoretical calculations and field experience, the presently configured thrust applicator MPS will not be able to develop the necessary shear resistance at the anchor pad-soil interface in soft clay (i.e. less than 1.0 tsf unconfined compressive strength) in order to penetrate at any depth for any horizontal distance. The thrust applicator MPS can operate in a residual environment with the same limitations as the mandrel MPS. In addition, this MPS has the directional control ability to avoid objects using a minimum radius of curvature with a build angle of $8^{o}/100$ ft while its "kink" radius of curvature is $15^{o}/100$ ft. These values are less than the mandrel MPS because of the rigidly connected front section on the thrust applicator MPS.

These two basic MPS's are presently available and have been tested in several different soil conditions. However, prior to the investigation for this thesis, the thrust applicator system was thought to be a conceptual model only.

In addition to the preliminary MPS design, three other important conclusions were reached during this investigation. First, the difficulty of drilling a horizontal hole is dependent upon the control of the drilling mud recirculation system. The proper bentonite drilling mud could provide enough lubricity to significantly reduce the skin friction between the soil and drill steel. The drilling mud also provides hole stability while cleaning the annular space of drilling fines, preferably without hydraulically fracturing the soil.

Secondly, the soil friction effect could be reduced with a neutrally buoyant drill pipe or thruster cable. If either the drill pipe or cable were neutrally buoyant in the horizontal section (Section II in Figure 3.14) of the drilling path, both Selection A and B could drill to at least 5000 ft (1525 m) horizontally at a depth of 500 ft(153 m).

Finally, a dimensionless analysis of the four alternate MPS's allowed their comparison to be quantifiable objective rather than subjective.

In conclusion, the two basic maneuverable penetration systems can be manufactured with the present state of technical knowledge as explained in Chapter 4. The most efficient combination of these subsystems, defined through the results of a

dimensionless analysis, will be able to penetrate a
soft ground condition down to a depth of 500 ft
(153 m) along a 5000 ft(1525 m) horizontal drill path.

CHAPTER 6

RECOMMENDED FUTURE RESEARCH

Throughout the course of research for this
thesis, several important and specific items have
been found to require future research in order to
advance the state of knowledge in maneuverable,
horizontal directionally controlled drilling in soft
ground. Below are listed a few of the more important
items. This list can obviously be expanded as
research and development continue in this
embryonic field.

     1) The mandrel and thrust applicator MPS
should be compared through a competitive field
test in one of the four proposed geological
environments.

     2) During this test an instrumented
package should be mounted on both MPS's to
measure the normal force, torque, vibration, and
RPM at the drill bit.

     3) Conduct extensive research into the
effectiveness of various drilling muds to
stabilize the hole and retain the soil particles
in the horizontal section of the drill hole.

     4) The dimensionless parameter
relationships between geology and the MPS should

be expanded and verified to allow the users to
make a logical selction of subsystems in varying
subsurface strata.

5) Methods of producing neutrally buoyant
cable and pipe should be investigated to deter-
mine the feasibility of neutral buoyancy for
reducing the skin friction along the drill pipe
or cable.

6) The DRILCO thrust applicator should be
redesigned for efficient soft ground operation,
or possibly developing another thruster which
operates on the concept of vermiculating motion
such as the WORM.

7) The following subsystems should be
further developed to improve existing equipment:
a closed circuit downhole valving system for the
DRILCO thrust applicator; a 7-8 in(17.8-20.3 cm)
diameter tricone coring bit; and a more refinely
controlled hydraulic system for anchor pad and
deflection shoe extension.

8) Determine the applicability of the
W. H. Nichols hydraulic motor to the
mandrel MPS.

9) Further research should be conducted
into the actual condition of the drill pipe in
the bore hole to determine whether slender, free-
ended column buckling failure is occurring.

10) Investigate the assumption that the
annular pressure(ΔP_a) of the drilling fluid is
in equilibrium with the effective stress at the
bore hole wall boundary.

REFERENCES

Allen, James H. (1972), "Considerations for Rock Bit
    Selection and Operation," Drilling Magazine,
    May 1972.

_____. (1974), Letter, Smith Tool, Compton,
    California, October 15, 1974.

Ash, James, et al (1974), Improved Subsurface
    Investigation for Highway Tunnel Design and
    Construction, Department of Transportation
    Report FH-11-8036, May.

Bowen Tools (1972), "Instruction Manual Bowen Dyna-
    Flex Joint," Manual Number 5/4820, Bowen Tools,
    Incorporated, Houston, Texas, September 1, 1972.

Coffey, Roger (1975), Personal Communication, W. H.
    Nichols, Waltham, Massachusetts, January 21, 1975.

Cook, Neville G. W. ; Harvey, V. R. (1974),
    "An Appraisal of Rock Excavation by Mechanical,
    Hydraulic, Thermal and Electromagnetic Means,"
    Proceedings of the Third Congress of the
    International Society for Rock Mechanics, Denver,
    Colorado, Vol. I, Part B.

Dahl, H. Doug (1975), Personal Communication,
    Continental Oil Company, Ponca City, Oklahoma,
    January 10 and May 9, 1975.

Daily, James W. and Harleman, Donald R. F. (1966),
    Fluid Mechanics, Addison-Wesley Publishing
    Company, Incorporated, Reading, Massachusetts.

Deadman, D. J. and Slight, J. R. (1965), "A New
    Approach to the Duct-Rodding Problem--Ductmotor
    No. 1," Post Office Electrical Engineer Journal,
    Vol. 58, Part 2, pp. 91-2, 1965.

DeGrand, Ralph A. (1975), Personal Communication and
    letter, Century Electric Motor Company,
    Gettysburg, Ohio, February 26, 1975.

Eastman Oil Well Survey Company (1969), "Turbodrill Handbook," Houston, Texas, May 19, 1969.

Edmond, Tibor (1975), Personal Communication, Continental Oil Company, Ponca City, Oklahoma, January 10 and 28, 1975.

Emery, Myron (1973), "Directional Control of Boring," Pipeline and Gas Journal, May, pp. 84-98.

_____. (1974), Letters, Titan Contractors, Sacramento, California, October 2, November 13 and 27, December 2, 1974.

_____. (1975), Personal Communications, Titan Contractors, Sacramento, California, January 6-8, 1975.

Gaberson, Howard (1975), Personal Communication, Naval Civil Engineering Laboratory, Port Hueneme, California, January 7, 1975.

Gardner, Lloyd L. (1975), Letter, Smith Tool, Irvine, California, January 29, 1975.

Graf, Walter Hans (1971), Hydraulics of Sediment Transport, McGraw-Hill Book Company, New York.

Hedberg, Jan (1975), "Geotechnical and Geophysical Exploration in Soft Ground Utilizing Horizontal Boreholes," Master's Thesis, MIT, Cambridge, Massachusetts, to be published June, 1975.

Hettiaratchi, D. (1974), Letter, The University of Newcastle Upon Tyne, Newcastle Upon Tyne, England, July 15 and September 5, 1974.

Hickerson, Thomas F. (1964), Route Location and Design, McGraw-Hill Book Company, New York.

Høeg, Kaare (1965), "Pressure Distribution on Underground Structural Cylinders," Doctor of Science Thesis, Department of Civil Engineering, MIT, May 14, 1965.

IMCO (1974), Applied Mud Technology, A Division of Halliburton Companies, Houston, Texas.

Kellner, Jack M. (1974), Letters, DRILCO, Midland, Texas, October 9 and December 9, 1974.

Leet, L. Dan, and Judson, Sheldon (1971), _Physical Geology_, 4th ed., Prentice-Hall, Incorporated, New Jersey.

Lowrance, Michael (1975), Letter, Milchem Drilling Fluids Division, Houston, Texas, January 21, 1975.

McClelland, Bramlette (1974), "Design of Deep Penetration Piles for Ocean Structures," Ninth Terizaghi Lecture, Journal of the Geotechnical Engineering Division, Vol. 100, GT7, July.

Peck, Ralph B. (1969), "Excavation and Tunneling in Soft Ground, State-of-the-Art," Report to Seventh International Conference on Soil Mechanics and Foundations, Mexico City, Mexico.

Rubin, Llewelyn A. (1974), "An Overview of Horizontal-Borehole Geophysical Techniques," ASCE Specialty Conference, Subsurface Exploration for Underground Excavation and Heavy Construction, Henniker, New Hampshire, August 11-16, 1974.

Skempton, A. W. (1951), "The Bearing Capacity of Clays," Building Research Congress, London, The Institute of Civil Engineers, Division I, Part 3.

Spearman, C. A. (1974), Letter, British Gas Corporation, Newcastle Upon Tyne, England, October 28, 1974.

Still, William L. (1975), Letter, Aerospace Industrial Associates, Incorporated, Purcellville, Virginia, January 30, 1975.

Taylor, Frank (1975), Personal Communication, REDA Pump Company, Bartlesville, Oklahoma, January 20, 1975.

Teng, Wayne C. (1962), _Foundation Design_, Prentice-Hall, Incorporated, Englewood Cliffs, New Jersey.

Terzaghi, Karl and Peck, Ralph B. (1967), Soil Mechanics in Engineering Practice, 2nd ed., Wiley, New York, 1967.

Tschebotarioff, Gregory P. (1973), _Foundations, Retaining and Earth Structures_, McGraw-Hill Book Company, New York.

Tschirky, John E. (1974), Letter, Dyna-Drill, Long Beach, California, October 8, 1974.

_____. (1975), Personal Communication, Dyna-Drill, Long Beach, California, January 7, 1975.

The University of Texas at Austin (1974), "Controlled Directional Drilling," Petroleum Extension Service.

Vesic, A. S. (1973), "Analysis of Ultimate Loads of Shallow Foundations," ASCE, Journal of Soil Mechanics and Foundations Division, Vol. 99, SM1, pp. 45-73.

Williams, D. E. and Gaberson, H. A. (1973), "Polytoroidal Tunneling Thruster for Specialized Navy Applications," Technical Note N-1266, Naval Civil Engineering Laboratory, Port Hueneme, California, February.

Wilson Downhole Services (1975), "School of Drilling Technology," Houston, Texas.

BIBLIOGRAPHY

Brantly, J. E. (1971), <u>History of Oil Well Drilling</u>,
     Gulf Publishing Company, Houston, Texas.

Florence, Harold V., and Albert, Frank J. (1973),
     "The Underground Piercing Tool," Journal of
     American Water Works Association, Vol. 65,
     No. 12, pp. 800-802, December.

Kidd, B. C., and Wood, S. M. Muir (1970), "Soft
     Ground Tunnelling," The Technology and
     Potential of Tunnelling, The South African
     Tunnelling Conference.

Paone, James, et al (1968), "Horizontal Boring
     Techniques: A State-of-the-Art Study," Bureau
     of Mines, Information Circular #8392, September.

Penman, A. D. M., et al (1971), "Observed and
     Predicted Deformation in a Large Embankment Dam
     During Construction," Proceedings, The
     Institute of Civil Engineering, Vol. 49, May-
     June, 1974.

Pickett, George W. (1967), "Techniques and
     Deflection Tools in High-Angle Drilling: Past,
     Present and Future," Journal of Petroleum
     Technology, pp. 469-476, April.

Williamson, T. N. ed. (1964), "Scientific and
     Technical Applications Forecast--Excavation,"
     Department of Army.

LIST OF CONTRIBUTORS

Directional Drilling Contractor

Mr. Martin D. Cherrington
President
Titan Contractors Corporation
593 Market Street, Suite 200
San Francisco, California 94105
415-495-3883

Downhole Drill Motors

Mr. John E. Tschirky
Chief Engineer
Dyna-Drill
P. O. Box 327
Long Beach, California
213-426-7186

Mr. Roger Coffey
W. H. Nichols Company
48 Woerd Avenue
Waltham, Massachusetts 02154
617-894-0650

Mr. Ralph A. DeGrand
Chief Product Engineer
Century Electric Motor Company
306 North Bridge Street
Gettysburg, Ohio 45328
513-447-2221

Mr. Satish Goel
REDA Pump Company
P. O. Box 1181
Bartlesville, Oklahoma 74003
918-661-2000

Mr. Richard Bentley
Eastman Whipstock, Inc.
P. O. Box 14609
Houston, Texas 77021
713-748-2350

Mr. Scov Murray
Imperial Oil, Ltd.
Calgary, Canada
Alberta

Thrust Applicators

Mr. Jack Kellner
Engineer, New Product Development
DRILCO
P. O. Box 3135
Midland, Texas 79701
915-683-5431

Mr. Doug Dahl
Director of Mining Research
Continental Oil Company
P. O. Box 1267
Ponca City, Oklahoma
405-762-3456

Mr. William L. Still
President
Aerospace Industrial Associates, Inc.
P. O. Box 878
Purcellville, Virginia 22132
703-338-7134

Mr. H. A. Gaberson
Research Mechanical Engineer
Naval Civil Engineering Laboratory
Port Hueneme, California 93043
805-982-5117

Mr. C. A. Spearman
Manager, Development Division
British Gas Corporation
Engineering Research Station
Killingworth, P. O. Box 1LH
Newcastle Upon Tyne, England
Telex 53470

Drill Bits

Mr. Lloyd L. Gardner
Chief Engineer Standard Products
P. O. Box 15500
17871 Von Karman Avenue
Irvine, California 92705
714-540-7010

Mr. B. J. Whitworth
Chief Engineer
Hughes Tool Company
P. O. Box 2539
Houston, Texas 77001
713-926-3101

Mr. Robert Stuart
Varel Manufacturing Company
P. O. Box 20156
Dallas, Texas 75220
214-351-6487

Drilling Mud Fluids

Mr. Michael Lowrance
Technical Development Engineer
Milchem, Drilling Fluids Division
P. O. Box 2211
Houston, Texas 77027

Mr. Preston Moore
Baroid Division, N. L. Industries
Houston, Texas
713-225-0391

IMCO Services
Division of Hallibarton Company
Houston, Texas
713-622-5555

Mud Pumps

Mr. Richard Soltys
Gardner-Denver Company
P. O. Box 26436
Dallas, Texas 75226

Others

Dr. D. Hettiaratchi
Lecturer
Department of Agricultural Engineering
University of Newcastle Upon Tyne
Newcastle Upon Tyne, England
STD code ONE 2.28511

Mr. John Halase
Supervisor of Production Mill
Box 900
Youngstown Sheet and Tube Company
Youngstown, Ohio
216-755-1411

Mr. Ira Davis
Wilson Downhole Services
P. O. Box 1492
Houston, Texas 77001
713-225-0736

Bowen Tools, Inc.
2429 Crockett Street
Houston, Texas 77001
713-869-6711

Mr. L. J. McLaughlin
Chairman, Installation Methods Subcommittee
Electric Power Research Institute
P. O. Box 10412
Palo Alto, California 94304
415-493-4800

Mr. A. Penman
Building Research Station
Garston, Watford
Herts, England WD2 7JR

Mr. N. Osifchin
Director, Building and Energy Systems Laboratory
Bell Laboratories
Whippany Road
Whippany, New Jersey 07981
201-386-3000

Mr. Roy A. Sishin
Manager, Operating and Engineering Services
American Gas Association
1515 Wilson Boulevard
Arlington, Virginia 22209
703-524-2000

APPENDIX A

LIST OF TERMS, DEFINITIONS, AND SYMBOLS

A - Arc angle associated with a particular build angle (α) for a circular drill path.

Annular Space - The space surrounding a cylindrical object within a cylinder. The space around a pipe in a borehole is often termed the annulus, and its outer wall may be either the wall of the borehole or the casing.

Barrel - A volumetric unit of measure used in the petroleum industry consisting of 42 gal.

Bentonite - A plastic, colloidal clay, largely made up of the mineral sodium montmorillonite, a hydrated aluminum silicate. For use in drilling fluids, bentonite has a yield in excess of 85 bbl/ton. The generic term "bentonite" is neither an exact mineralogical name, nor is the clay of definite mineralogical composition.

Build Angle (β) - Rate of angular change along a drill path measured in degrees per 100 feet.

Circulation - The movement of drilling fluid from the suction pit through pump, drill pipe, bit, annular space in the hole, and back again to the suction pit. The time involved is usually referred to as circulation time.

Circulation, Loss of (or Lost) - The result of drilling fluid escaping into the formation by way of crevices or porous media.

Circulation Rate - The volume flow rate of the circulating drilling fluid usually expressed in gallons or barrels per minute.

Clay - A plastic, soft, variously colored earth, commonly a hydrous silicate of alumina, formed by the decomposition of feldspar and other aluminum silicates. See also Attapulgite, Bentonite, High Yield, Low Yield, and Natural Clays. Clay minerals are essentially insoluble

in water but disperse under hydration, shearing forces such as grinding, velocity effects, etc., into the extremely small particles varying from submicron to 100-micron sizes.

D - Depth of the horizontal drill path.

Diameter - The distance across a circle measured through the center. In the measurement of pipe diameters, the inside diameter-I.D.- is that of the interior circle, whereas the outside diameter-O.D.- is the diameter of the circle formed by the exterior surface of the pipe.

Dog-Leg - The "elbow" caused by a sharp change of direction in the well bore.

Drilling Mud or Fluid - A circulating fluid used in rotary drilling to perform any or all of various functions required in the drilling operation.

Equivalent Circulating Density - For a circulating fluid, the equivalent circulating density in lb/gal equals the hydrostatic head (psi) plus the total annular pressure drop (psi) divided by the depth (ft) and by 0.052.

Entry Point - Point on the earth's surface where the drill bit initially penetrates.

Filter Cake - Filter cake refers to the layer of concentrated solids from the drilling mud that forms on the walls of the borehole opposite permeable formations. Also called mud cake.

Filter-Cake Texture - The physical properties of a cake as measured by toughness, slickness, and brittleness.

Fluid - A fluid is a substance readily assuming the shape of the container in which it is placed. The term includes both liquids and gases. It is a substance in which the application of every system of stresses (other than hydrostatic pressure) will produce a continuously increasing deformation without any relation between time rate of deformation at any instant and the magnitude of stresses at that instant. Drilling fluids are usually Newtonian and plastic, seldom pseudoplastic, and rarely dilatant fluids.

Fluid Flow - The state of fluid dynamics of a fluid
    in motion is determined by the type of fluid
    (e.g., Newtonian, plastic, pseudoplastic, dila-
    tant), the properties of the fluid such as
    viscosity and density, the geometry of the sys-
    tem, and the velocity. Thus, under a given set
    of conditions and fluid properties, the fluid
    flow can be described as plug flow, laminar
    (called also Newtonian, streamline, parallel, or
    viscous) flow, or turbulent flow. See above
    terms and Reynolds number.

Fluid Loss - Measure of the relative amount of fluid
    lost (filtrate) through permeable formations or
    membranes when the drilling fluid is subjected
    to a pressure differential.

H - Horizontal distance from the point of entry to
    the point the drill bit transverses to the
    horizontal plane.

Horsepower(HP) - $\dfrac{\text{Force(lb) x speed(ft/min)}}{33,000}$

    The rate of doing work (transferring energy)
    equivalent to lifting 33,000 lb 1 ft/min
    (33,000 ft-lb/min). This is also 550 ft-lb/sec.

Hydraulic Horsepower(HHP) - $\dfrac{\text{Circulation rate(GPM)} \times \text{differential Pressure(psi)}}{1,714}$

Instaneous Radius of Curvature - The radius of
    curvature along a spiral drill path measured at
    a particular point.

Jet Bit   - A drilling bit having nozzles through
    which the drilling fluid is directed in a high
    velocity stream.

Key Seat - That section of a hole, usually of
    abnormal deviation and relatively soft forma-
    tion, which has been eroded or worn by drill
    pipe to a size smaller than the tool joints or
    collars. This keyhole type configuration will
    not allow these members to pass when pulling out
    of the hole.

Kinematic Viscosity - The kinematic viscosity of a
    fluid is the ratio of the viscosity (e.g., cp in
    g/cm-sec) to the density (e.g., g/cc) using con-
    sistent units. In several common commercial
    viscometers the kinematic viscosity is measured
    in terms of the time of efflux (in seconds) of a
    fixed volume of liquid through a standard
    capillary tube or orifice.

Kink Radius of Curvature - The smallest radius of curvature in a undulated section of the drill path.

Laminar Flow - Fluid elements flowing along fixed streamlines which are parallel to the walls of the channel of flow. In laminar flow, the fluid moves in plates or sections with a differential velocity across the front which varies from zero at the wall to a maximum toward the center of flow. Laminar flow is the first stage in a Newtonian fluid; it is the second stage in a Bingham plastic fluid. This type of motion is also called parallel, streamline, or viscous flow.

Mud - A water-or-oil-base drilling fluid whose properties have been altered by solids, commercial and/or native, dissolved and/or suspended. Used for circulating out cuttings and many other functions while drilling a well. Mud is the term most commonly given to drilling fluids.

Mud Pit - Earthen or steel storage facilities for the surface mud system. Mud pits which vary in volume and number are of two types: circulating and reserve. Mud testing and conditioning are normally done in the circulating pit system.

Mud Program - A proposed or followed plan or procedure for the type(s) and properties of drilling fluid(s) used in drilling a well with respect to depth. Some factors that influence the mud program are the casing program and such formation characteristics as type, competence, solubility, temperature, pressure, etc.

Mud Pumps - Pumps at the rig used to circulate drilling fluids.

Newtonian Fluid - The basic and simplest fluids from the standpoint of viscosity consideration in which the shear force is directly proportional to the shear rate. These fluids will immediately begin to move when a pressure or force in excess of zero is applied. Examples of Newtonian fluids are water, diesel oil, and glycerine. The yield point as determined by direct-indicating viscometer is zero.

Pressure-Drop Loss - The pressure lost in a pipeline or annulus due to the velocity of the liquid in the pipeline, the properties of the fluid, the condition of the pipe wall, and the alignment of the pipe. In certain mud-mixing systems, the

loss of head can be substantial.

Pseudoplastic Fluid - A complex non-Newtonian fluid that does not possess thixotropy. A pressure or force in excess of zero will start fluid flow. The apparent viscosity or consistency decreases instantaneously with increasing rate of shear until at a given point the viscosity becomes constant. The yield point as determined by direct-indicating viscometer is positive, the same as in Bingham plastic fluids; however, the true yield point is zero. An example of a pseudoplastic fluid is guar gum in fresh or salt water.

Radius - Radius of curvature of the drill path, $R = l_s/2 \cot(A/2)$.

Rate of Shear - The rate at which an action, resulting from applied forces, causes or tends to cause two adjacent parts of a body to slide relatively to each other in a direction parallel to their plane of contact. Commonly given in rpm.

Reynolds Number - A dimensionless number, Re, that occurs in the theory of fluid dynamics. The diameter, velocity, density, and viscosity (consistent units) for a fluid flowing through a cylindrical conductor are related as follows:

Re=(diameter)(velocity)(density)/(viscosity) or
$= DV\rho/\mu$.
The number is important in fluid hydraulics calculations for determining the type of fluid flow, i.e., whether laminar, or turbulent. The transitional range occurs approximately from 2000 to 3000; below 2000 the flow is laminar, above 3000 the flow is turbulent.

Shear Strength - A measure of the shear value of the fluid. The minimum shearing stress that will produce permanent deformation.

Stuck - A condition whereby the drill pipe, casing, or other devices inadvertently become lodged in the hole. May occur while drilling is in progress, while casing is being run in the hole, or while the drill pipe is being hoisted. Frequently a fishing job results.

Tool Joint - A drill-pipe coupler consisting of a pin and a box of various designs and sizes. The internal design of tool joints has an important effect on mud hydrology.

Torque - A measure of the force or effort applied to a shaft causing it to rotate. On a rotary rig this applies especially to the rotation of the drill stem in its action against the bore of the hole. Torque reduction can usually be accomplished by the addition of various drilling-fluid additives.

Tricone Bit - A type of rock bit in which each of three toothed, conical cutters is mounted on friction reducing bearings. The bit body is fitted with nozzles--jets--through which the drilling fluid is discharged.

Velocity - Time rate of motion in a given direction and sense. It is a measure of the fluid flow and may be expressed in terms of linear velocity, mass velocity, volumetric velocity, etc. Velocity is one of the factors which contribute to the carrying capacity of a drilling fluid.

Viscosity - The internal resistance offered by a fluid to flow. This phenomenon is attributable to the attractions between molecules of a liquid, and is a measure of the combined effects of adhesion and cohesion to the effects of suspended particles, and to the liquid environment. The greater this resistance, the greater the viscosity.

Wall Cake - The solid material deposited along the wall of the hole resulting from filtration of the fluid part of the mud into the formation.

Washover Pipe - An accessory used to go over the outside of tubing or drill pipe, thus to clean out the annular space and permit recovery or movement.

Water Table - The underground level at which water is found.

Yield Value - The yield value (commonly called "yield point") is the resistance to initial flow, or represents the stress required to start fluid movement. This resistance is due to electrical charges located on or near the surfaces of the particles. The values of the yield point and thixotropy, respectively, are measurements of the same fluid properties under dynamic and static states. The Bingham yield value, reported in lb/100 sq ft, is determined by the direct-indicating viscometer by subtracting the plastic viscosity from the 300-rpm reading.

α - Build Angle - Rate of angular change along a
    drill path measured in degrees per 100 feet.

β - Exit Angle - Angle of incline the drill path forms
    with the horizontal as the drill bit returns to
    the earth's surface.

Note: Most of the above definitions have been taken
        from IMCO (1974), The University of Texas at
        Austin (1974).

APPENDIX B

CALCULATIONS FOR IMPORTANT
CONSIDERATIONS IN HORIZONTAL BORING

B.1   INTRODUCTION

This appendix contains the basic soil mechanics, strength of materials, and fluid dynamics calcula- tions behind the analysis of the operational characteristics of the Maneuverable Penetration System(MPS) in soft ground as defined in Table B.1. The underlying assumptions for these calculations have been made from an intuitive standpoint of what might be happening in the drill hole and do not reflect the results of laboratory tests or detailed field data comparisons.

These assumptions are as follows:

1) The clay soil is assumed to be in an undrained condition since 99% of the bore hole is located below the water table. Clay strengths are given in Table B.1, repeated here for con- venience. Any sand encountered will be com- pletely saturated, and total stresses are equal to effective stresses.

2) The maximum depth below the ground surface is 500 ft(153 m) and the optimal hori- zontal drill hole distance is 5000 ft(1525 m).

Table B.1   Shear Strength of Cohesive Soils
(Terzaghi and Peck, 1967)

$S_u = \frac{1}{2} q_u$ (tsf)	Consistency	Unit Weight (pcf)
0-0.125	Very Soft	100-200
0.125-0.25	Soft	
0.25-0.50	Medium	110-130
0.50-1.0	Stiff	120-140
1.0-2.0	Very Stiff	
2.0	Hard	130+

3) Any estimations of the maximum equipment
limits for bending stresses have not considered
continuous, long-term operating conditions under
these bending stresses and how this will affect
the future performance of the equipment.

B.2   MINIMUM S_u FOR THRUST APPLICATOR OPERATION

First, the capabilities of the DRILCO thrust
applicator will be calculated with a modified version
which has the following characteristics:

Thrust Applicator O.D. - 8 in
Anchor pads
    1 set of piston pads (3 pads/set)
    3 sets of cylinder pads
    Pad dimensions - 1-1/2 x 8 in
    Single pad area - 12 in^2
    Total pad area available - 144 in^2

The undrained shear strength for clay and the
shear strength for sand are calculated using equations
shown in Figure B.1. To calculate the minimum S_u
required for the thruster to pull its hose down the
hole, the frictional force on the hose must first
be calculated.

Figure B.2 Friction Forces Acting on Thruster Hose
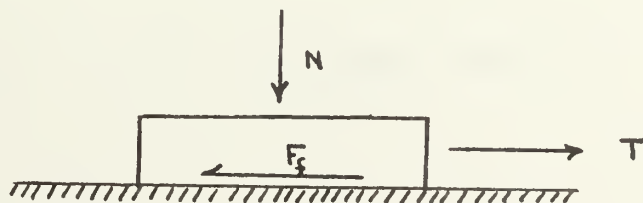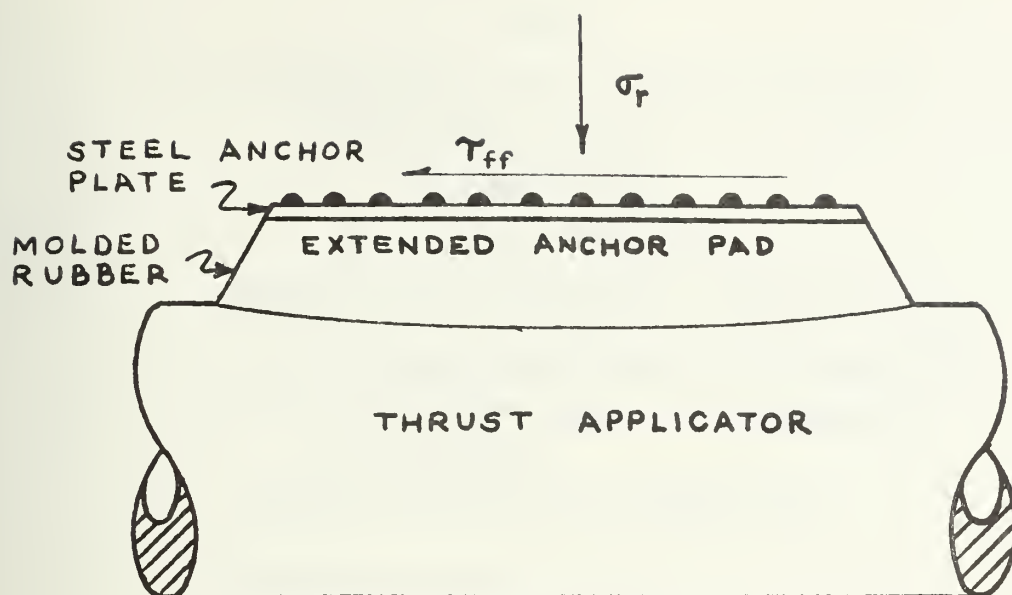
Cohesionless soil:

$$\tau_{ff} = S_s = S_d = \bar{\sigma}_r \tan \beta$$

Cohesive soil:

$$S_s \simeq C = S_u$$

$$S_s \simeq S_u \simeq F_s / A_t$$

F_s = Shearing Force

A_t = Total Pad Area

$\bar{\sigma}_r$ = Anchoring stress applied across anchor pad surface area

FIGURE B.1 Shear Strength Formulas

To overcome static friction $T > F_f = \psi N$

for sands $\psi = \tan \bar{\phi}$

assume $\bar{\phi} = 35^o$

$\psi = \tan 35^o = 0.7$

Weight of the individual thruster hoses:

1-1" drilling fluid hose - @ 24.4#/100'

2-1/2" hydraulic hose - @ 13.4#/100'

$N = 51.2\#/100'$

$F_f = (0.7)(51.2) = 35.84 \approx 36\#/100'$

For 1000' tunnel length

$F_f = 360\#$

Then, S_u is determined for a thrust applicator as follows:

Thrust Applicator - 8" O.D.

12 pads - (1.5" x 8")

$A_t = 144$ sq in

$S_s = \frac{\sigma_r}{A_t} \tan \bar{\phi} = F_f / A_t = 360/144 = 2.5$ psi

For sands:

$S_s \approx S_u = 0.18$ tsf

B.3   BEARING CAPACITY AND CONTRACT STRESS CALCULATIONS

Before any bearing capacity or contact stress calculations are performed, the size of the anchor pad must be redesigned for soft ground conditions for the dimensions stated in Section B.2. An estimation of a redesigned thruster pad is based on finding the length of a chord for the same degree of arc at a

larger radius.

$$c = 2\sqrt{h(d-h)}$$

$$h = r(1 - \cos\alpha)$$

where c = cord length

h = cord diameter

$$\frac{c_2^2}{c_1^2} = \frac{r_2 d_2}{r_1 d_1}$$

$$c_2 = c_1 \sqrt{\frac{r_2 d_2}{r_1 d_1}}$$

if, $c_1 = 1.06$ in

$d_1 = 5.75$ in

$d_2 = 8.0$ in

then, $c_2 = 1.47$ in ≈ 1.5 in $(3.8$ cm$)$

<u>Calculation of Maximum Contact Stress</u>   The maximum
contact stress is based on the maximum allowable
hydraulic pressure the thrust applicator is able to
apply to the anchor shoe diaphragm before rupture
occurs.   For the particular calculation this value of
maximum pressure will be 500 psi(3450 kN/m^2), however,
this is a measured value for the 5-3/4 in(14.6 cm)
O.D. thrust applicator.

For a thrust applicator anchor pad:

$$A_H = 1.06 \times 6 = 6.36 \text{ in}^2$$

$$A_c = 1.5 \times 8 = 12 \text{ in}^2$$

$$\Delta P_H = 500 \text{ psi}$$

$$\sigma_{c_{max}} = 500 \left(\frac{6.36}{12} \right) = 265 \text{ psi}$$

$$\sigma_{c_{max}} = 19.08 \text{ tsf} = 1826 \text{ kN/m}^2$$

where: A_H=anchor pad area in contact with
           hydraulic fluid

A_C=anchor pad area in contact with the
           soil

For the CONOCO deflection shoe:

ΔP_H=600 psi   is the constant pressure applied to
           the drive piston (2 in dia.) for
           extending the deflection shoe

$$A_H = \frac{\pi d^2}{4} = \frac{\pi (2)^2}{4} = 3.142 \text{ in}^2$$

$$A_c = 4 \times 8 = 32 \text{ in}^2 \text{ (estimated dimensions)}$$

$$\Delta P_H = 600 \text{ psi}$$

$$\sigma_{c_{max}} = 600 \left(\frac{3.142}{32} \right) = 58.9 \text{ psi}$$

$$\sigma_{c_{max}} = 4.24 \text{ tsf} = 406 \text{ kN/m}^2$$

Minimum Contact Stress   The minimum contact stress is
defined as the pressure required to first move the
anchor pad.   This pressure for the 5-3/4 in(14.6 cm)
O.D. thrust applicator is 100 psi(690 kN/m^2).

$$A_H = 6.36 \text{ in}^2$$

$$A_c = 12 \text{ in}^2$$

$$\Delta P_H = 100 \text{ psi}$$

$$\sigma_{c_{max}} = 100 \left(\frac{6.36}{12} \right) = 53 \text{ psi}$$

$$\sigma_{c_{max}} = 3.6 \text{ tsf} = 364 \text{ kN/m}^2$$

Bearing Capacity Calculations   The bearing capacity
has been calculated for the type of failure shown in
Figure 3.8.

In clay: $q = N_c S_u + P_A$

where N_c=bearing capacity factor
P_A=annular pressure

N_c (Rectangular shape)=$(0.84+0.16 \ B/L)N_c$ (Square)

N_c (Square)=6.2

Table B.2   Annular Pressure for 2-3/8 in O.D. Dyna-
Drill with 2-3/8 in Dia. Drill Pipe and a
4-1/2 in Hole

Drill Hole Length - ft	P_A - tsf
1000	1.58
2000	3.17
3000	4.75
4000	6.34
5000	7.92

Thrust Applicator (pad dimensions 1-1/2 x 8 in)

$$N_c = \left[0.84 + \left(\frac{1.5}{8} \right)(0.16) \right] 6.2 = 5.39$$

$$S_u = 0.25 \text{ tsf}$$

$$L = 1000 \text{ ft}$$

$$q_{ult} = 5.39(0.25) + 1.58 = 2.93 \text{ tsf}$$

Deflection Shoe (dimensions 4 x 6 in)

$$N_c = \left[0.84 + \left(\frac{4}{6} \right) 0.16 \right] 6.2 = 5.87$$

$$q_{ult} = 5.87(0.25) + 1.58 = 12.36 \text{ tsf}$$

In Sand:

$$q_{ult} = \frac{1}{2} S_\gamma \gamma B N_\gamma + P_a$$

$$S_\gamma = (1.0 - 0.4 \, B/L) \qquad \text{(Vesic, 1973)}$$

$$\gamma = \text{unit weight of bearing soil}$$

Soil Parameters: $\bar{\phi} = 30°$

$$\gamma = 110 \text{ pcf}$$

$$\gamma_b = 47.6 \text{ pcf}$$

$$N_\gamma = 22.5 \text{ (loose sand)}$$

Thrust Applicator:

$$S_\gamma = 1 - 0.4 \left(\frac{1\frac{1}{2}}{8} \right) = 0.925$$

For $L = 5000$ ft

$$q_{ult} = 0.925 (0.5)(47.6)(0.125)(22.5) + 15,840$$

$$q_{ult} = 7.96 \text{ tsf}$$

Deflection Shoe:

$$S_\gamma = 1 - 0.4 \left(\tfrac{4}{6}\right) = 0.733$$

For $L = 5000$ ft

$$q_{ult} = 0.733(0.5)(47.6)(0.33)(22.5) + 15,840$$

$$q_{ult} = 8.0 \text{ tsf}$$

B.4   MAXIMUM EXIT ANGLE

The maximum exit angle calculations have been performed for both sand and clay. In order to include all the forces acting on the MPS, a few of the drilling fluid flow calculations have been performed in this section.

Fluid Flow Calculations The Rheoplot data needed to calculate the Reynold's number for the pseudoplastic drilling mud has kindly been provided by Mr. M. Lowrance from Milchem, Drilling Fluids Division.

For these following calculations the generalized Reynold's number was adopted. The pseudoplastic stress-deformation relationship was modeled using the familiar Power Law $\tau = K(du/dy)^n$.

Generalized Reynold's Number:

$$N_R' = \frac{D^n V^{2-n}}{K*}\rho$$

The empirical corrected K*:

$$K* = K(8^{n-1})\left(\frac{3n+1}{4n}\right)^n$$

n is the slope of the straight line on the
    Rheoplot

When this relationship is plotted on log-log paper it takes the form:

$$\log \tau = \log K + n \log(du/dy)$$

where the log K is the τ intercept at n log(du/dy)=1 and n is the slope of the straight line as shown in Figure B.3. Another way to look at the log-log plot of this relationship is as a stress-strain diagram for the mud slurry and the log K value is the dynamic yield point of the mud slurry and the "n" value is the dynamic viscousity of the fluid.

From Figure B.3 the following values were estimated:

$$K = 2 \times 10^{-2} \text{ lbs-sec/ft}^2$$

$$n = 0.404$$

Therefore,

$$K^* = (2 \times 10^{-2})(8^{-.592})(1.37)^{0.404}$$

$$K^* = 6.63 \times 10^{-3} \text{ lb-sec/ft}^2$$

The drag forces of fluid flowing past a neutrally buoyant drill pipe are calculated with a 2-3/8 in(6.0 cm) diameter steel drill pipe in a 4-1/2 in(11.4 cm) hole.

$$V = Q / A$$

$$Q = \frac{25}{7.48(60)} = 0.0557 \text{ ft}^3/\text{sec}$$

$$A = \frac{\pi(d_1^2 - d_2^2)}{4} = 0.0797 \text{ ft}^2$$

$$V = 0.7 \text{ ft/sec}$$
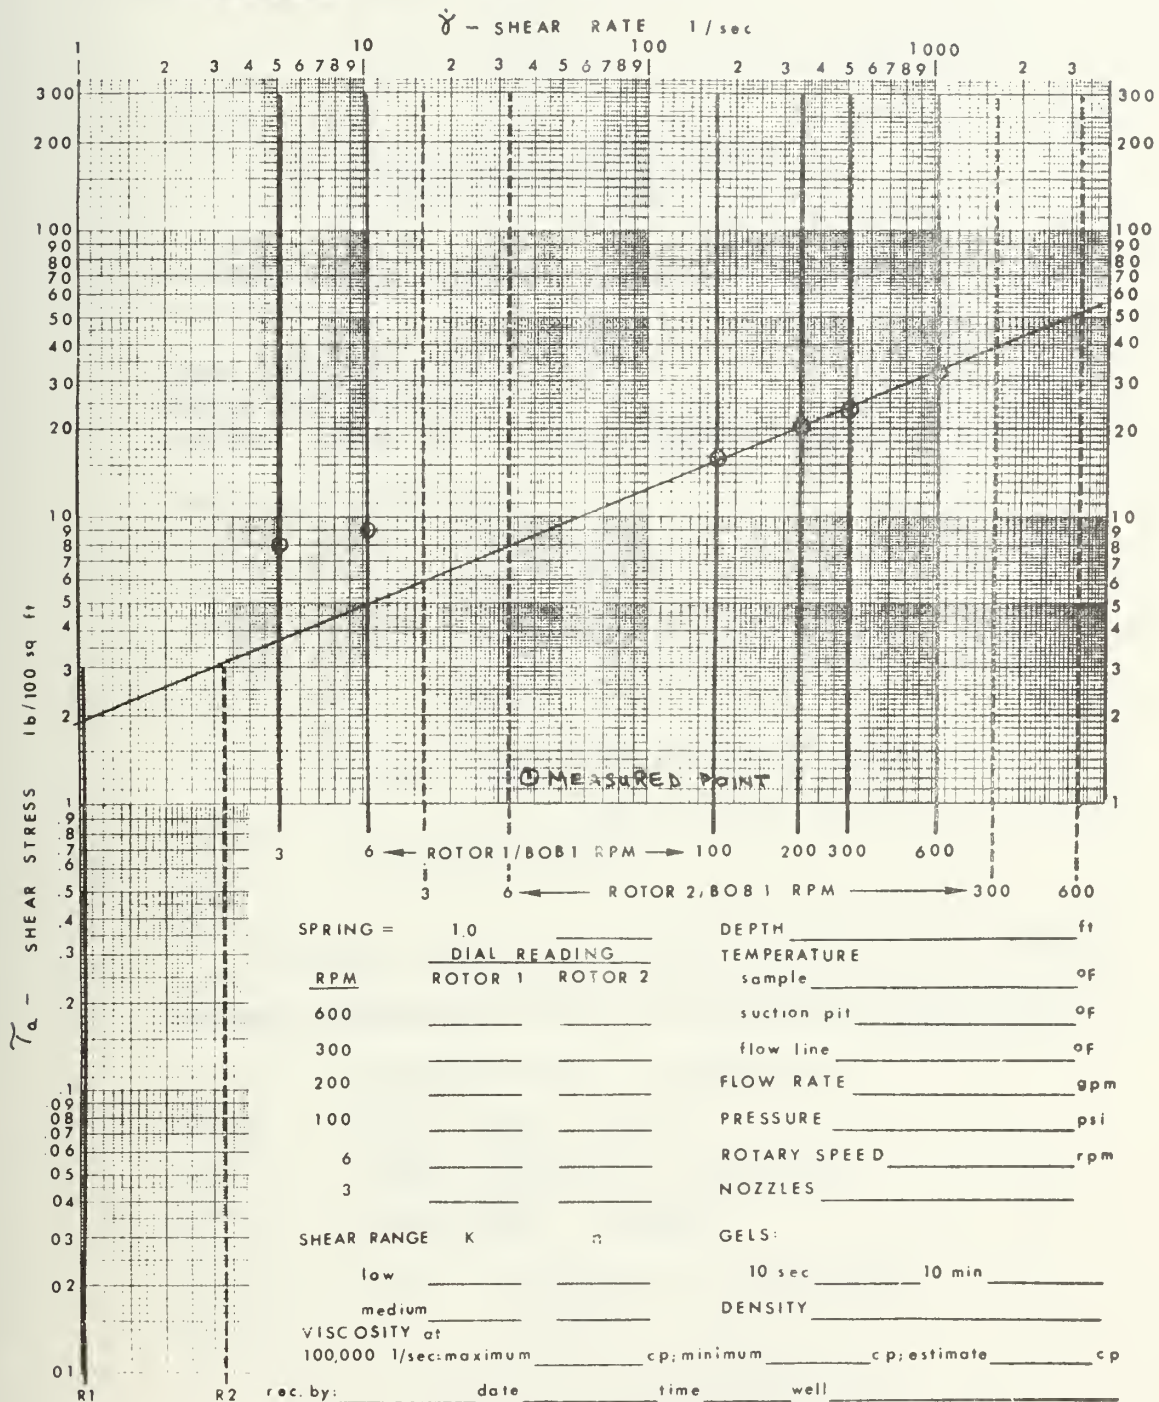
FIGURE B.3 Milchem Rheoplot[R]

201

The mud density for a 21 lb/bbl drilling mud is:

$$\rho = 65.834 \ lbs/ft^3$$

$$d = \frac{d_1^2 - d_2^2}{d_1 + d_2} = 2.125 \ in = 0.177 \ ft$$

$$N_R' = \frac{(0.177)^{0.404}(0.7)^{1.57}(65.824)}{6.63 \times 10^{-3}(32.2)}$$

$$N_R' = 87.8$$

Then the empirical
value for C_D for
laminar flow is:
$$C_D = \frac{1.28}{\sqrt{N_R'}} = \frac{1.28}{\sqrt{87.8}} = 0.137$$

The drag force is:

$$D = \frac{1}{2} \rho \ C_D \ V^2 \ S$$

$$\text{where} \ S = Surface \ area / linear \ foot$$

$$= \frac{\pi d (1)}{LF} = 0.62 \ ft^2/LF$$

$$D = \frac{1}{2} (65.824)(0.1097)(0.49)(0.62)}{32.2}$$

$$D = 0.034 \ lbf/LF$$

Similar values are calculated for the DRILCO

thrust applicator with the following dimensions:

        Thruster O.D. - 5-3/4 in
        Hole Size - 7 in
        Cable Diameter - 1-1/2 in
        Flow Rate - 25 GPM

$$V = Q/A = \frac{0.0557}{0.098} = 0.568 \ ft/sec$$

$$N_R' = \frac{(0.076)^{0.404}(0.218)^{1.57}(65.824)}{6.63 \times 10^{-3}(32.2)} = 10.1$$

and $C_D = 0.403$

then the drag force is:

D=7.7 lb/100 L.F.

Forces Acting on the Mandrel MPS in Each Section

The weight calculations for the mandrel MPS are as follows:

2-3/8" Dyna-Drill	-	60 lbs
4-1/2" bit	-	3 lbs
Navigation equip.	-	15 lbs
Sensing equip.	-	20 lbs
2-3/8" Drill Pipe for 250'		-958 lbs
Total		1056 lbs

The buoyant weight of the drill pipe in a 21 lb/bbl drilling mud was calculated to be 3.83 lbs/L.F.

The following calculations have been made for a horizontal distance of 3000 and 5000 feet in Section II, as described in Chapter 3.

An estimate of the maximum normal force that can be applied to the mandrel MPS system is based on Euler's slender buckling criteria as applied to the drill pipe. The model used for these calculations, as shown below, simulates the condition illustrated by Figure 3.12b for Titan Contractors' drilling rig.

$2 \frac{3}{8}$ in O.D (1.995 in I.D.) Drill Pipe

$n = 2$

$\ell = 25$ ft

$E = 29,000$ ksi

$$P_{crit} = \frac{n \pi^2 E A}{(\ell / r)^2}$$

where $A = \frac{\pi (d_1^2 - d_2^2)}{4} = 1.304$ in^2

$r = \sqrt{r_1^2 + r_2^2} / 2 = 0.775$ in^2

$$P_{crit} = \frac{2 \pi^2 (29,000)(1.304)}{(387)^2}$$

$$P_{crit} = 4.93 \text{ kips}$$

For the normal force calculations a reduction factor of 1.25 is applied to P_{crit} which gives the maximum allowable normal force to be applied to the drill pipe at the surface (i.e. $F_N = P_{crit}/1.25 = 3.95$ kips)

Table B.3   Forces Acting on the Mandrel MPS in Sand

Section	I	II		III
Normal Force F_N(lbf)		3950		
Frictional Force F_f(lbf)	469	47		—
Drag Force D(lbf)	25	3000 / 128	5000 / 212	25

204

The friction factor for Section II takes into account
the friction encountered at the two bends in the drill
path as shown in Figure 3.14 and explained in Chapter
3. For a horizontal distance equal to 3000 ft (915 m)

$$F=D+1.1F_f=176.5+516=693$$

$$W=1058 \text{ lbs}$$

$$F_N=3950$$

The exit angle criteria as defined in Section 3.7,

$$(F_N-F)/W = \frac{3950-693}{1058} = 3.08$$

For a horizontal distance of 5000 ft(1525 m)

$$(F_N-F)/W=3.05$$

Therefore, if the drill pipe remains neutrally
buoyant in Section II (i.e. zero soil friction) then
the mandrel MPS can drill out of the hole along an
exit angle of 90^o.

Maximum Horizontal Distance for Mandrel MPS   These
calculations take into consideration the effects of
soil resistance along Section II and how this will
change the maximum horizontal distance the mandrel
MPS can drill before it has zero normal force at the
bit. The maximum thrust available for the horizontal
section is the normal force plus the angular weight
component minus the friction forces along Section I
(T=3950+884-512=4322 lbf). To find the maximum
horizontal distance the MPS can travel, divide the

available thrust by the combined linear footage values
for friction and drag forces.

$$T = D + F_f$$

where $D = 0.0425$ lbf/L.F.

                   $F = 0.7(3.83$ lbs/L.F.$)$

Note: The buoyant weight of the drill pipe is
3.83 lbs/L.F.

$$H_{max} = \frac{4322 \text{ lbs}}{2.72 \text{ lbs/L.F.}} = 1589 \text{ L.F.}$$

Forces Acting on Thrust Applicator MPS in Sand

The weight estimations for the thrust applicator
MPS are as follows:

         Thrust Applicator - 100 lbs
         Hydraulic Motor   -   10 lbs
         7" bit   -   6 lbs
         Deflection Shoe   -   10 lbs
         Orientation Motor -   10 lbs
         Hose @ 51.2#/100' - <u>128 lbs</u>
                    Total - 279 lbs

To calculate what the maximum pulling capacity
available(MPCA) for the thrust applicator would be,
the Mohr-Coulomb failure criteria was adapted in the
following manner:

$$\tau_f = \bar{\sigma}_n \tan \bar{\phi}$$

Assuming K=1 (coefficient of earth pressure) at
depth equal 250 ft then $\bar{\sigma}_n$ is the average normal stress
required for anchoring. A worst condition case will

be analyzed:

loose sand, $\bar{\phi} = 30°$, $\gamma_t = 110$ pcf

$$\bar{\sigma}_h = Z \gamma_b = 11,900 \text{ lbs}/ft^2 \ (570 \text{ kN}/m^2)$$

$$\tau_f = 11,900 \tan 30° = 6871 \text{ lbs}/ft^2 \ (329 \text{ kN}/m^2)$$

$$MPCA = \tau_f \ A_t$$

where A_t = total anchor pad contact area

The redesigned, enlarged anchor pads with dimensions 1-1/2 x 8 in(3.8 x 20.3 cm) are combined in three sets of cylinder anchors for the following calculations.

Table B.4   Forces Acting on the Thrust Applicator MPS in Sand

Section	I	II	III
MPCA (lbf)		5153	
Frictional Force F_f(lbf)	98	9.8	—
Drag Force D(lbf)	4	$\dfrac{3000 \quad 5000}{23 \quad 39}$	4

For a horizontal distance of 3000 ft(915 m)

$$\frac{MPCA-F}{W} = \frac{5153-1140}{279} = 14.4$$

where now $F = D + 1.1 F_f + T$

T is assumed to be equal to 1000 lbf

For a horizontal distance of 5000 ft(1525 m)

$$\frac{MPCA-F}{W} = 14.3$$

Now, if the worst condition is assumed where the thruster hose is dragging on the bottom of the hole in Section II, how will the thruster MPS perform? The friction force for Section II is $F_f'=1075$ lbs (@ H=3000 ft); therefore,

$$F=D+1.1F_f+F_f'+T=2249 \text{ lbs}$$

For a horizontal distance of 3000 ft(915 m)

$$\frac{MPCA-F}{W}=\frac{5153-2249}{534}=5.4$$

For a horizontal distance of 5000 ft(1525 m)

$$\frac{MPCA-F}{W}=4.2$$

Both of these values indicate the possibility exists for the thrust applicator MPS to exit at an angle up to 90^o, even if it must drag its hose behind it in loose sand.

Mandrel MPS Operating in Clay The same mandrel MPS previously mentioned will be used for the following calculations.

Table B.5 Forces Acting on the Mandrel MPS in Clay

Section	I	II		III
Normal Force F_N (lbf)		3950		
Friction Force in Sticky Clay F_f (lbf)	2209	221		2209
Friction Force in over-consolidated clay F_f (lbf)	469	47		469
Drag Force D (lbf)	25	$\frac{3000}{128}$	$\frac{5000ft}{212}$	25

The friction force is different for a sticky clay
than an overconsolidated clay as explained in
Section 3.9. In addition, the frictional forces are
now assumed values based on empirical information
referenced in the same section.

For a horizontal distance equal to 3000 ft(915 m)

$$\frac{F_N - F}{W} = \frac{3950 - 1162}{1056} = 2.64$$

and for a 5000 ft(1525 m) distance,

$$F_N - F_W = 2.56$$

The ratio $F_N - F_W$ is equal to $\sin\beta$ in clay, therefore
both distances can be drilled and the maximum angle
is 90°.

The maximum horizontal distance the mandrel can travel along the horizontal section of the drill path was calculated using the previously mentioned relationships. The available thrust(T), after the first bend is as follows:

$$T = F_N + W' - F_f - D = 3950 + 916 - 2209 - 25$$

$$T = 2632 \text{ lbs}$$

$$H = \frac{T}{F_f} = \frac{2632 \text{ lbs}}{3.83 \text{ lbs/L.F.}} = 687 \text{ L.F.}$$

Thrust Applicator MPS Operating in Clay The following calculations are based on the assumption that the only clay the thrust applicator MPS can operate in is overconsolidated, stiff clay ($S_u = 2.0$ tsf).

Table B.6 Forces Acting on the Thrust Applicator MPS in Overconsolidated, Stiff Clay

Section	I	II		III
MPCA (lbf)	3000			
Friction Force F_f (lbf)	329	33		329
Drag Force D (lbf)	4	3000 23	5000 ft 39	4

For the horizontal distance of 3000 ft(915 m),

$$\frac{MPCA - F}{W} = \frac{3000 - 722}{279} = 8.1$$

Since the thrust applicator system is lighter in weight than the mandrel MPS, the thrust applicator

will surely operate over a distance of 5000 ft, even
if it must drag its cables behind it. This, of
course, assumes that the hole remains open in the
sticky clay environment.

B.5   PRESSURE LOSS CALCULATIONS FOR A MANDREL MPS

The pressure loss throughout the entire mandrel
system is of concern when ordering the proper size
surface mud pump and when analyzing whether or not
the system selected will hydraulically fracture the
soil at the drill bit. For these calculations, basic
fluid dynamic relationships have been applied.
The mandrel MPS is a 2-3/8 in(6 cm) O.D. Dyna-Drill
system.

The pressure along a horizontal pipe was
calculated using the Darcy-Weisbach equation:

$$h_f = f \, \frac{L}{d} \, \frac{V^2}{2g}$$

where
$$d = \frac{d_1^2 - d_2^2}{d_1 + d_2}$$

$$f = \frac{64}{N_R} \qquad \text{an empirical friction factor for laminar flow}$$

and $\Delta P = \rho_f h_f$

ρ_f = density of the drilling fluid

$$N_R' = 537$$

$$f = \frac{64}{537} = 0.119$$

$$h_f = 0.119 \left(\frac{1000}{0.166} \right) \frac{(2.26)^2}{64.4} = 56.86 \text{ ft}/1000 \text{ LF}$$

$$\Delta P = \rho \, h_f = \frac{65.824 (56.86)}{144} = 26 \text{ lbs}/\text{in}^2$$

The annular pressure loss for a 4-1/2 in(11.4 cm) diameter hole with a 2-3/8 in(6 cm) diameter drill pipe follows:

$$N_R' = 87.8$$

$$f = 0.729$$

$$d = \frac{d_1^2 - d_2^2}{d_1 + d_2} = 0.177 \text{ ft}$$

$$V = 0.7 \text{ ft}/\text{sec}$$

$$h_f = 0.729 \left(\frac{1000}{0.177} \right) \left(\frac{0.49}{64.4} \right) = 31.3 \text{ ft}/1000 \text{ LF}$$

$$\Delta P_a = \rho \, h_f = \frac{31.3 (65.824)}{144} = 14.3 \text{ psi}/1000 \text{ LF}$$

ECD Calculations for the Mandrel MPS   For the above described mandrel MPS the following ECD calculations were made. ECD or equivalent circulating density is thoroughly explained in Chapter 3. Because of the uncertainty of the exact increase in drilling mud density due to drilling fines, the previously calcu-lated annular pressure is increased by a factor of 1.5. In addition the pressure differential for the depth of the drill bit is added to the annular pressure loss for a horizontal pipe.

212

For a drill hole at a depth of 100 ft(31 m) and a horizontal distance of 1000 ft(310 m),

$$ECD = \rho + \frac{\Delta P_a}{0.52 L}$$

$$\rho = 8.83 \; lb/gal \quad \text{for} \; 21 \; lb/bbl \; drilling \; mud$$

$$\Delta P_a = \frac{100(65.824)}{144} + 21.5 = 67.2 \; psi$$

$$ECD = 8.83 + \frac{67.2}{0.052(1100)} = 10.01 \; lbs/gal \; (1.21 \; g/cm^3)$$

At a depth of 500 ft(153 m),

$$\Delta P = \frac{500(65.824)}{144} + 21.5 = 250 \; psi$$

$$ECD = 12.04 \; lb/gal \; (1.46 \; g/cm^3)$$

B.6   PRESSURE LOSS CALCULATIONS FOR A THRUST APPLICATOR MPS

The pressure loss calculations for the thrust applicator apply the same basic relationships already mentioned. The thrust applicator is 5-3/4 in(14.6 cm) in diameter with a 1-1/2 in(3.8 cm) O.D. trailing hose operating in a 7 in(17.7 cm) diameter hole.

The pressure loss within the drilling slurry hose is as follows:

$$V = Q/A = 10.13 \; ft/sec$$
$$N_R' = 3.76 \times 10^3$$
$$f = 64/N_R' = 0.017$$
$$h_f = 0.017 \left(\frac{1000}{0.083}\right) \frac{(10.13)^2}{64.4} = 326 \; ft/LF$$
$$\Delta P = \rho h_f = 149 \; psi/1000 \; LF$$

Annular Pressure Loss

$$d = \frac{d_1^2 - d_2^2}{d_1 + d_2} = \frac{49 - 2.25}{51.25} = 0.912 \text{ in} = 0.076 \text{ ft}$$

$$N_R' = \frac{(0.076)^{0.404}(0.218)^{1.59}(65.824)}{6.63 \times 10^{-3}(32.2)} = 10.1$$

$$f = \frac{64}{10.1} = 6.34$$

$$h_f = 6.34 \left(\frac{1000}{0.076}\right)\frac{(0.218)^2}{64.4} = 61.56 \text{ ft}/1000 \text{ LF}$$

$$\Delta P = h_f \, \rho = \frac{(61.56)(65.824)}{144} = 28.1 \text{ psi}/1000 \text{ LF}$$

ECD Calculations   At 100 ft(31 m) deep and at a horizontal distance of 1000 ft(310 m),

$$ECD = 8.83 + \frac{73.81}{0.052(1100)} = 10.12 \text{ lb/gal}(1.22 \text{ g/cm}^3)$$

and at 500 ft(153 m) deep

$$ECD = 12.3 \text{ lb/gal}(1.49 \text{ g/cm}^3)$$

APPENDIX C

SPECIFICATIONS ON DOWNHOLE MOTORS

C.1   INTRODUCTION

Four downhole motors are discussed in this
appendix because of their previous application to
directional drilling in general, or specifically with
horizontal directional drilling. These four motors
are: Dyna-Drill, Turbo-drill, the electric motor, and
the hydraulic motor. Presented in this order, the
various drawings will provide the necessary level of
understanding for this thesis. If the reader desires
more detail, he is encouraged to contact the indi-
viduals at the specific company on the List
of Contributors.

C.2   DYNA-DRILL

The Dyna-Drill was born as a result of an idea
Mr. Wallace Clark had when he saw a Moyno^R pump
operating as an auxillary piece of equipment on an
oil rig. The rotor and stator for the Dyna-Drill
shown in Figure C.1 are illustrated in Figure C.2a
while the basic principle of operation of the Moyno

1 DUMP VALVE

2 MULTI-STAGE MOTOR

3 CONNECTING ROD

4 BEARING AND DRIVE
SHAFT ASSEMBLY

5 ROTATING BIT SUB
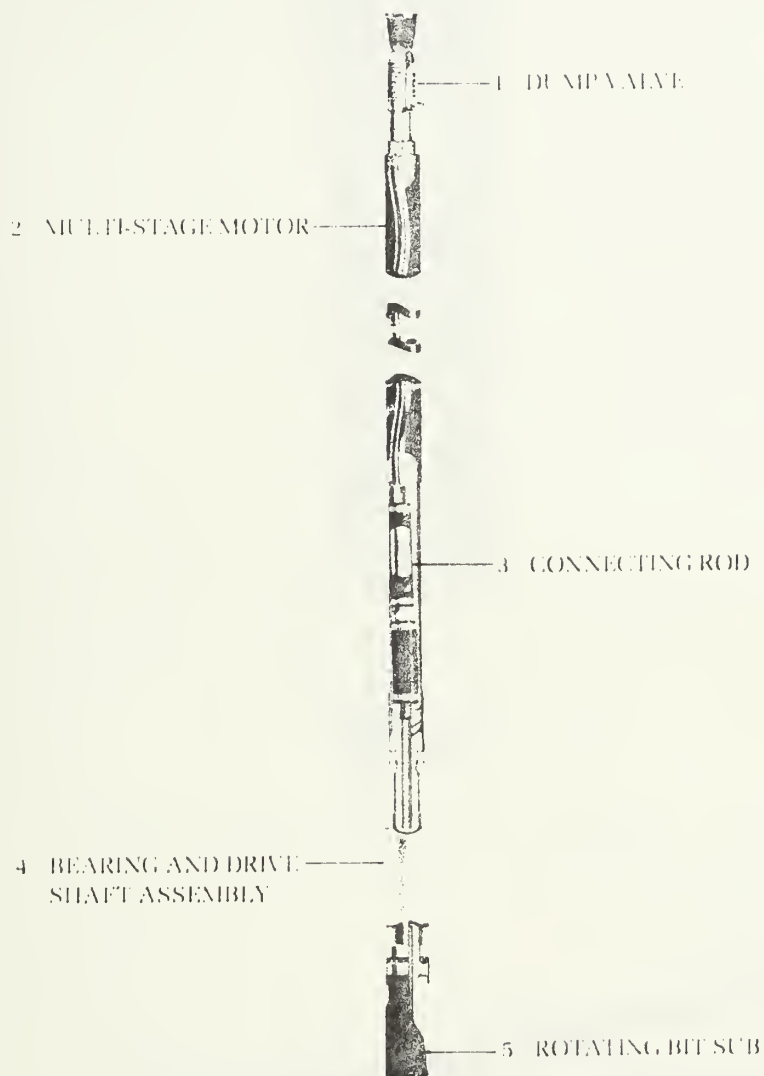
FIGURE C.1 Dyna-Drill (After Dyna-Drill, 1975)

a. STATOR

b. ROTOR
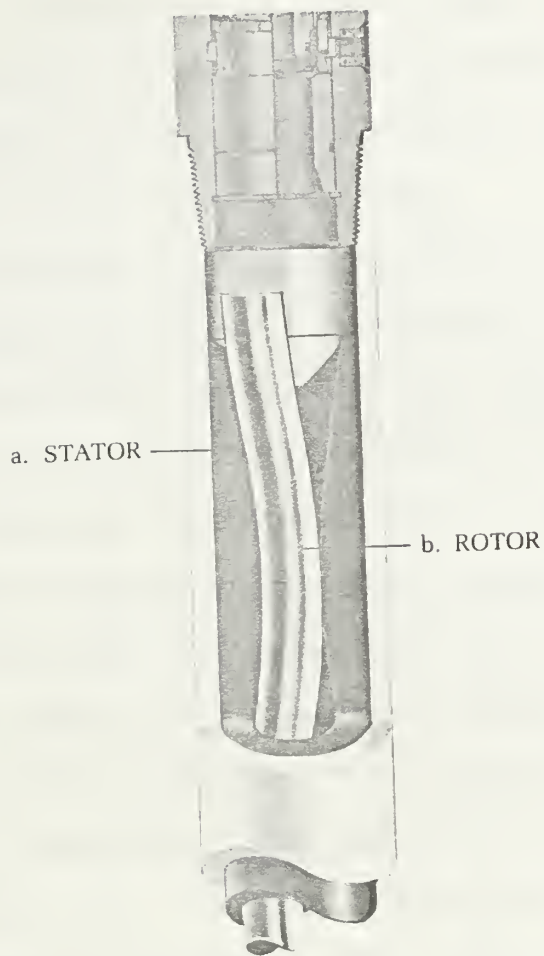
FIGURE C.2(a) Dyna-Drill Stator
(After Dyna-Drill, 1975)

connecting rod

stator

rotor
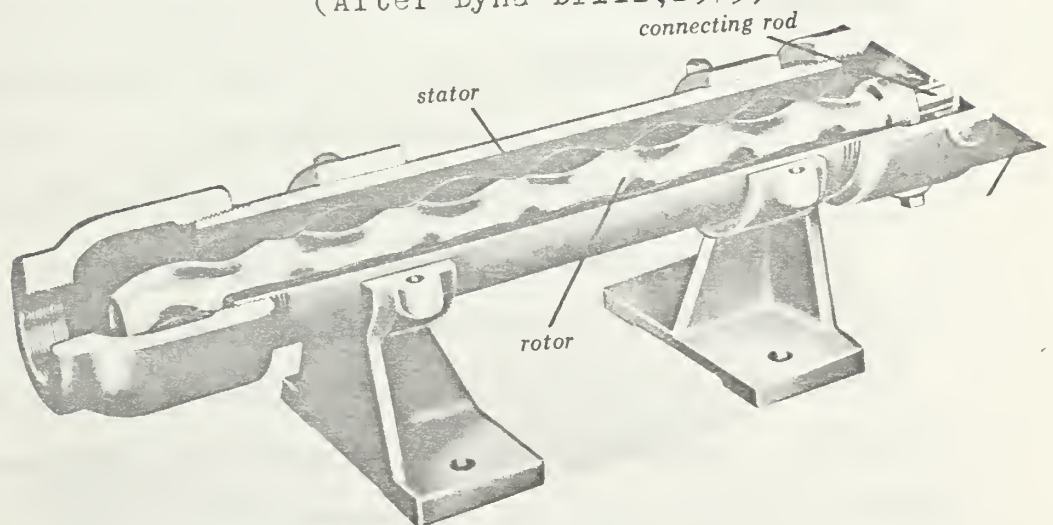
FIGURE C.2(b) Moyno[R] Pump Cross-section
(After Moyno Pump, 1974)

pump is illustrated in Figure C.2b. Smith International, Incorporated supported the initial development of this downhole motor, thereby forming the Dyna-Drill Company in 1964.

The Dyna-Drill is essentially a multi-stage Moyno pump operating in reverse as a motor which comprises about one-half of the length of the tool. The obround, spiral stator shown in Figure C.3 is made from synthetic rubber which is compressively fit to reduce slippage. The stator houses the solid steel rotor which has a regular sinusoidal longitudinal wave pattern shape which moves eccentrically within the stator while rotating. The upper end of this rotor is free ended while the bottom end is attached to the connecting rod. The connecting rod in Figure C.4 consists of a universal joint that converts the eccentric motion of the rotor to concentric motion required for the drive shaft. The bit sub in Figure C.5 is at the bottom end of the drive shaft and is the only external moving part.

As the drilling fluid is pumped downward between the stator and the rotor, the rotor is displaced and rotated within the stator as the fluid flows along the spiral path of the stator. This in turn powers the connecting rod, drive shaft, bit sub and bit.

FIGURE C.3 End View of Dyna-Drill Stator
(After Dyna-Drill, 1975)
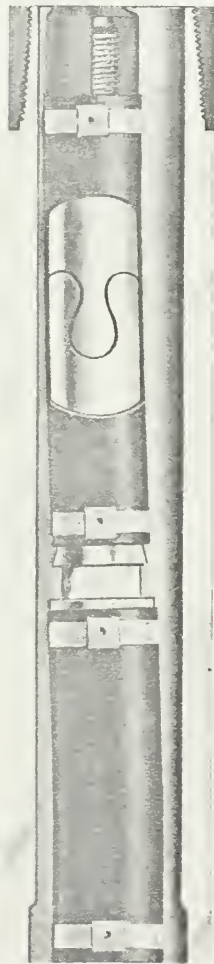
FIGURE C.4 Dyna-Drill Connecting Rod

219

ROTATING BIT SUB

FIGURE C.5 Bit Sub

220

Since the motor is a positive displacement
motor, the hydraulic horsepower and torque output
are a function of the pressure loss across the motor.

$$H.P._{Hyd} = \frac{GPM(\Delta Pressure)}{1714}$$

$$Efficiency = \eta = \frac{H.P._{mech}}{H.P._{Hyd}}$$

$$Torque = \frac{H.P._{mech}(63,025)}{RPM} \quad (in-lb)$$

The operational RPM can also be estimated from the
change in pressure (ΔP). Therefore, the pressure
loss across the motor is a very important factor when
drilling with a Dyna-Drill. If the ΔP increases
rapidly to a reading greater than twice the operating
ΔP, the Dyna-Drill has stalled. The bit weight
should be removed quickly when a Dyna-Drill stalls to
prevent extensive damage.

The Dyna-Drill configuration lends itself either
to a straight housing or bent housing assembly as
shown in Figure C.6. The straight housing assembly
is used with a bent or articulated sub while the bent
housing is attached to the drill pipe with a standard
connection. The bent housing tool has a set of ribs
on the underside of the tool directly above the bend
to help prevent the drill bit from dropping down
unintentionally.

FIGURE C.6 Dyna-Drill Bent and Straight Housing Assembly

Two sizes of the Dyna-Drill have been considered
in the final equipment design. The specifications
for these two devices are listed in Table C.1

Table C.1 Dyna-Drill Specifications

O.D. (in)	Length (ft)	ΔP (psi)	RPM	GPM	HP	Wt (lb)	Torque (ft-lb)	Hole Size (in)
2-3/8	7	600	1000	25	6	60	30	4-1/2
6-1/2	19.6	250	305	250	28	1422	467	12

C.3 TURBINE DRILL

In 1960, directional drilling companies were
beginning to appear in the oil well industry with a
turbine downhole motor attached to a bent sub.
This motor made it possible to deflect a well bore
without the use of a conventional whipstock.

The turbine motor has three sections to it:
a turbine section shown in Figure C.7; a replaceable
bearing section shown in Figure C.8; and a rotating
bit sub. The turbine section contains bladelike
rotors and stators illustrated in Figure C.9.
The stator is attached to the outer casing and is
held stationary, while the rotor is attached to the
shaft. Each rotor/stator section is called a stage.
Several stages are combined to make a turbine.

As the drilling mud is pumped down through the
turbine, the stator blades direct the fluid into the

DRIVE SHAFT
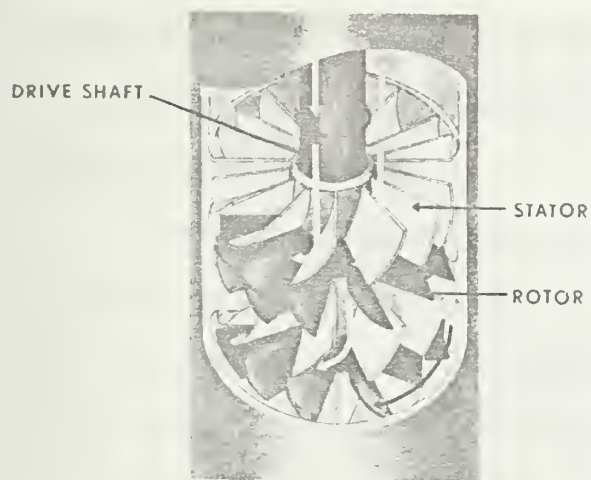
STATOR

ROTOR

FIGURE C.7 Turbine Section of Turbo-Drill
(After U.of Texas, 1972)
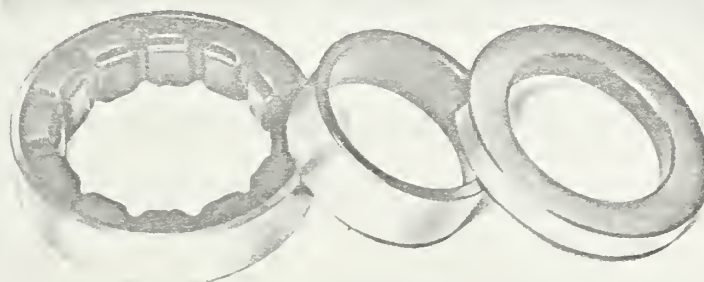
FIGURE C.8 Replaceable Bearing Section
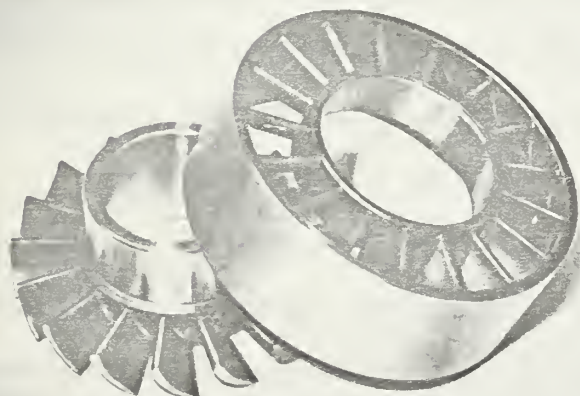(After Eastman, 1969)

FIGURE C.9 Turbine Rotor and Stator
(After Eastman, 1969)

224

rotor blades. The flow of the drilling mud forces
the rotor to rotate the shaft clockwise, which in
turn drives the bit.

Several difficulties arose in the initial appli-
cation of a turbine motor to directional drilling.
The operating rpm of this motor is approximately
1000 rpm. Therefore, the only bit which could be
successfully used with it was a diamond bit, while
the high rpm greatly reduced the bearing life.
The high rpm's and relatively low horsepower output
tended to result in the turbine motor stalling in
soft, sticky clay.

When the turbo-drill stalls, there is no direct
indication of this condition as there was with the
Dyna-Drill.

Finally, the turbo-drill is very sensitive to
bending because of the required alignment between
the rotor and stator blades. Any bending, resulting
from a sharp build angle, would result in binding or
excessive damage to the turbine.

For the reason stated above, along with the
excessive weight and length of the turbo-drill, lead
the writer to the conclusion that this downhole motor
would not be considered in the final equipment design
recommendations for horizontal drilling in soft
ground. Table C.2 lists the various specifications

for two sizes of turbo -drills available from
Eastman Whipstock, Incorporated. The cross-section
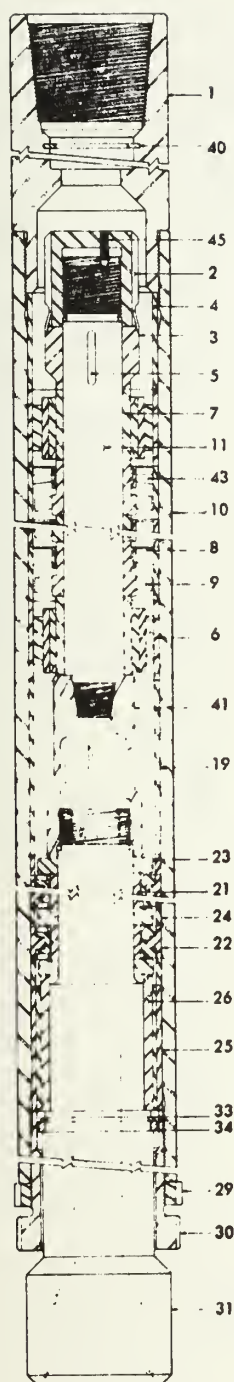of an Eastman turbo-drill is shown in Figure C.10.

Table C.2 Turbo-Drill

O.D. (in)	Lgth (ft)	ΔP (psi)	RPM	GPM	Stages	H.P. max	Wt (lb)	Stall Torque (ft-lb)	Hole Size (in)
$5\frac{1}{8}$	$18\frac{1}{2}$	328	780	250	60	26	750	272	$7\frac{7}{8}$
$6\frac{3}{4}$	$23\frac{3}{4}$	369	813	400	76	49.8	1985	591	$7\frac{7}{8}$

C.4 ELECTRIC MOTOR

Earth drilling with an electric motor is not a
new idea. The first use of this method goes back to
the early 1950's in Russia. However, the length of
these electrodrills ranged from 36-42-1/2 ft(11-13 m)
with power requirements ranging from 100-230 Kw.

The electric motor considered in this thesis for
use with a thrust applicator is an order of magnitude
smaller in size, while the power requirements are 10
orders of magnitude smaller than these Russian
electrodrills. This is because the requirements for
drilling small diameter holes in soft ground are
minimal compared to that being required of an electro-
drill in larger diameter holes.

Continental Oil Company (CONOCO) has successfully
adapted an ordinary submersible pump motor to drill
6 in(15 cm) diameter holes in soft coal (Dahl, 1975).

Item No.	Description
1	Top Sub ....
2	Shaft Cap....
3	Lockwasher-Turbine Section.
4	Stator Spacer
5	Shaft Key-Turbine Section...
6	Intermediate Bearing Body
7	Intermediate Bearing Sleeve
8	Stator
9	Rotor
10	Turbine Housing
11	Turbine Shaft
12	Internal Collar
17	Lockwasher-Bearing Section
18	Flow Ring
19	Spacer-Bearing Section
20	Shaft Key-Bearing Section
21	Thrust Bearing Sleeve....
22	Thrust Bearing Body
23	Thrust Disc
24	Thrust Bearing Spacer.
25	Lower Bearing Body
26	Lower Bearing Sleeve
28	Bearing Housing
29	Lower Sub Lock Ring
30	Lower Sub....
31	Bearing Shaft.....
32	Lower Bearing Spacer.
33	Retaining Ring...
34	Catch Ring
36	Spline Clutch Box.
37	Clutch Wear Pins
38	Clutch Spacer....
39	Spline Clutch Pin Sub.
40	Float Retainer Ring.
41	Shaft Coupling
42	Assembly "O" Ring..
43	Stator Screen....
44	Lift Sub..
45	Shaft Cap Lock Screw.
46	Baker Float*

DIRECTIONAL
INTEGRAL
TURBODRILL

FIGURE C.10 Turbine Drill Cross-section (After Eastman, 1969)
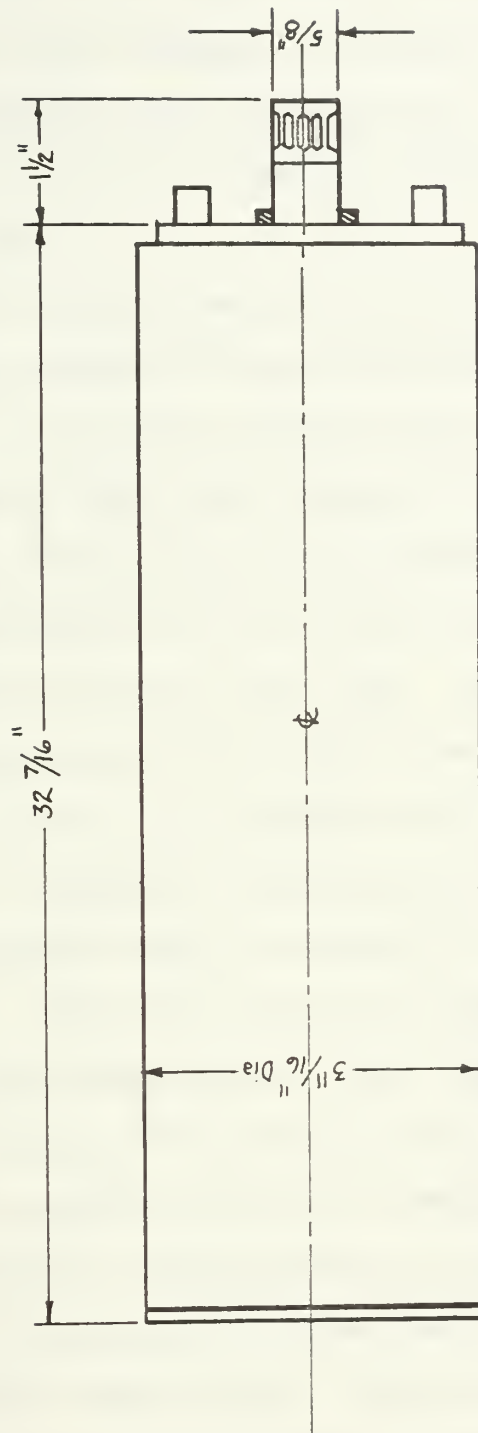
FIGURE C.11 Schematic of Century Electric Motor

228

This submersible pump motor is made by Century Electric Motor Company in Gettysburg, Ohio. The specifications for this motor are listed in Table C.3 while a schematic drawing is illustrated in Figure C.11.

The electric motor must be used with a reduction gear box because of the high output rpm's of the motor. A suitable planetary type gear box was designed by Reda Pump Company for one of their submersible motor pumps with available gear ratios varying from 28.51:1 to 3.165:1 for driving the drilling bit at 121-1095 rpm. The outside diameter of this unit is 4-1/2 in(11.4 cm) with a length of about 2 ft(0.6 m), wieghing 100 lbs(45.3 kg).

Two important considerations should be made if this electric motor is adapted to drilling in soft ground. Quick trip overload protectors should be used in all three legs of the three phase motor. This will prevent lock-up of the motor if it stalls from an overload and is not restarted immediately.

Another consideration is to maintain a constant flow of drilling fluid over the outside of the motor to prevent overloading. The standard flow requirement is a gallon/minute/H.P. which is easily satisfied by all of the final design models.

Table C.3 lists the important specifications
for the Century submersible motor.

Table C.3   Century Electric Motor

O.D. (in)	Length (ft)	Voltage	Amps	HP	RPM	Wt (lb)	Hole Size (in)
3-11/16	2.7 (4.7 with gear box)	460	10.0	5	3450	50	7

C.5   HYDRAULIC MOTOR

In an attempt to find a stubby, small diameter,
lightweight hydraulic motor that could be adapted to
the DRILCO thrust applicator, Continental Oil Company
(CONOCO) had the W. H. Nichols Company in Waltham,
Massachusetts make a special order gerotor pump
motor (Coffey, 1975).

The outcome of this special order was a gerotor,
internal gear, positive displacement pump motor.
This motor was designed for a flow rate of 30 GPM,
producing 300 rpm at 10 H.P. output and operating at
75% efficiency. Any type of drilling fluid can be
used to drive this motor. Because the torque vibra-
tions of the gerotor are minimal, there is essentially
no vibration associated with the operation of this
motor.

The most important part of this motor is the
gerotor in Figure C.12. The gerotor element consists
of an inner and outer gerotor and an eccentric

PIN STOP
IN HOUSING

REVERSING RING   OUTER ROTOR   INNER ROTOR
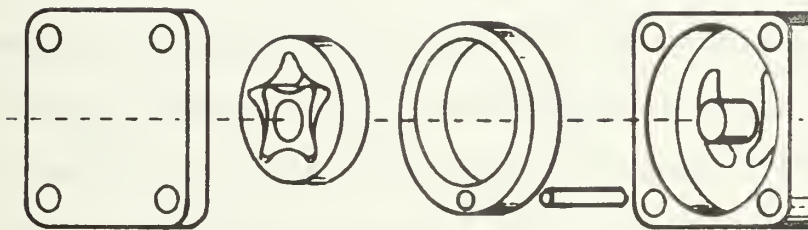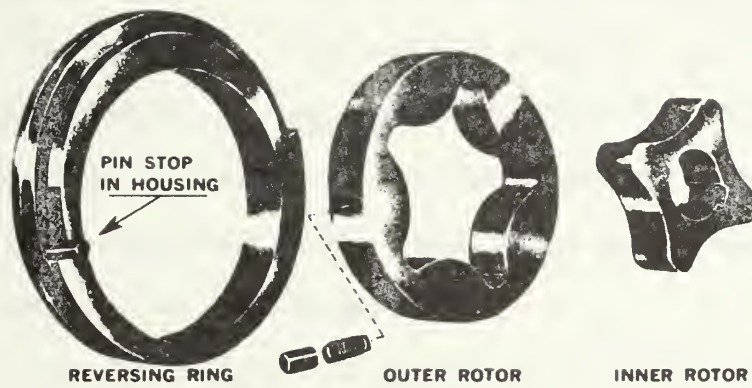
FIGURE C.12 Cerotor (After Nichols)

locator-ring. The inner gerotor always has one tooth less than the outer gerotor. This unit is placed in a casing or frame which provides housing and porting for the gerotor. The output capacity of this motor is a function of the number of gerotor units that are connected in series. For the previously mentioned design characteristics, the final motor had 16 sets of gerotor units in series.

The principle of operation of the gerotor is shown in Figure C.13.

Inlet ports in step 1 allow drilling fluid to fill a volume equal to the missing tooth. The toothed elements are mounted on fixed centers but turn eccentric to each other with the inner gerotor being mounted to the drive shaft. As the gerotors turn through steps 2 and 3 the chamber in which the fluid is carried decreases in size. At step 4 the fluid is forced out the discharge port into the next gerotor in series.

Table C.4 lists the important specifications for the particular motor designed for CONOCO.

Table C.4 Hydraulic Motor

O.D. (in)	Length (ft)	ΔP (psi)	RPM	GPM	HP	Wt (lb)	Torque (ft-lb)	Hole Size (in)
5	4	570	300	30	10	25	175	7
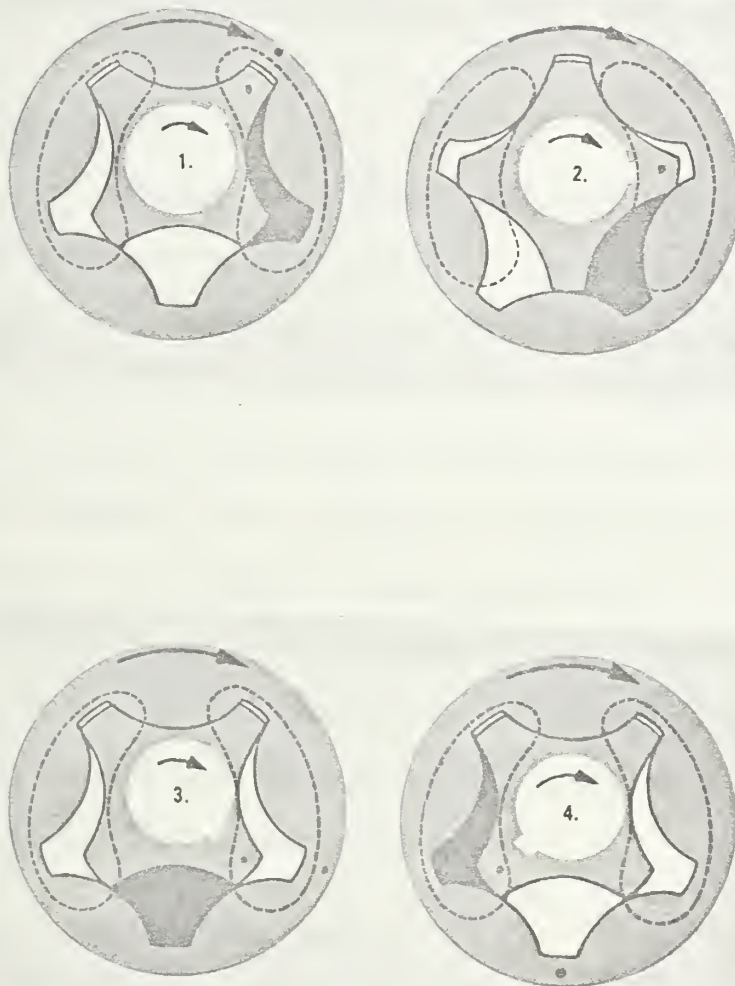
FIGURE C.13 Principle of Operation of Gerotor

233

APPENDIX D

SPECIFICATIONS ON DOWNHOLE THRUST APPLICATORS

D.1   INTRODUCTION

A thruster is defined as a relatively short
device which functions solely downhole by providing
a base for reactive torque from a drilling motor or
for a reactive normal force from a compacting mechan-
ism which in turn forms a subterranean hole.
This appendix will elaborate upon four of the
devices: the DRILCO thrust applicator, NURAT,
U.S. Navy Polytordial Tunneler, and WORM ^{TM*}
If additional information is required by the reader,
he is encouraged to contact the specific individuals
on the List of Contributors.

D.2   DRILCO THRUST APPLICATOR

The thrust applicator manufactured by DRILCO, in
Midland, Texas is a fully developed and operational
thruster invented by Jack Kellner. This device can
load and advance any type of drilling motor in any
direction. Most of its application to date has been

---

* The name WORM is the trade mark which the inven-
tor intends to apply to this system. It is so iden-
tified to preclude its assuming a generic connotation
(Still, 1975).

in horizontal drilling, primarily in coal, with the longest hole bieng 1000 ft(305 m) at a diameter of 6 in(15.2 cm). Figure D.1 is the 2-3/4 in(7.0 cm) version of the thruster laying beside a 1-3/4 in (4.5 cm) Dyna-Drill.

A schematic of the thrust applicator in Figure D.2 will be helpful in explaining the operation of this device. The thruster is a double-acting cylinder having a hollow piston rod running through both ends. There are two anchor positions; the cylinder anchors, and the piston rod anchors. The anchor pads shown in Figure D.3 are made of steel with cross ribbing to improve their frictional characteristics. The unit shown in Figure D.3 is a complete anchor set for the 5-3/4 in(14.5 cm) which has three anchor pads positioned at 120° intervals around the sleeve. The dark area next to the anchor pad, in Figure D.3, is a hard elastic rubber which is molded to the metal body, including the entire internal circumference of the anchor sleeve. This rubber serves two purposes. First it provides a means for returning the anchor pad to its original position after the hydraulic pressure is released. It also eliminates the problem of any particles being caught underneath the anchor pads as they contract for repositioning. As many as three sets of anchor
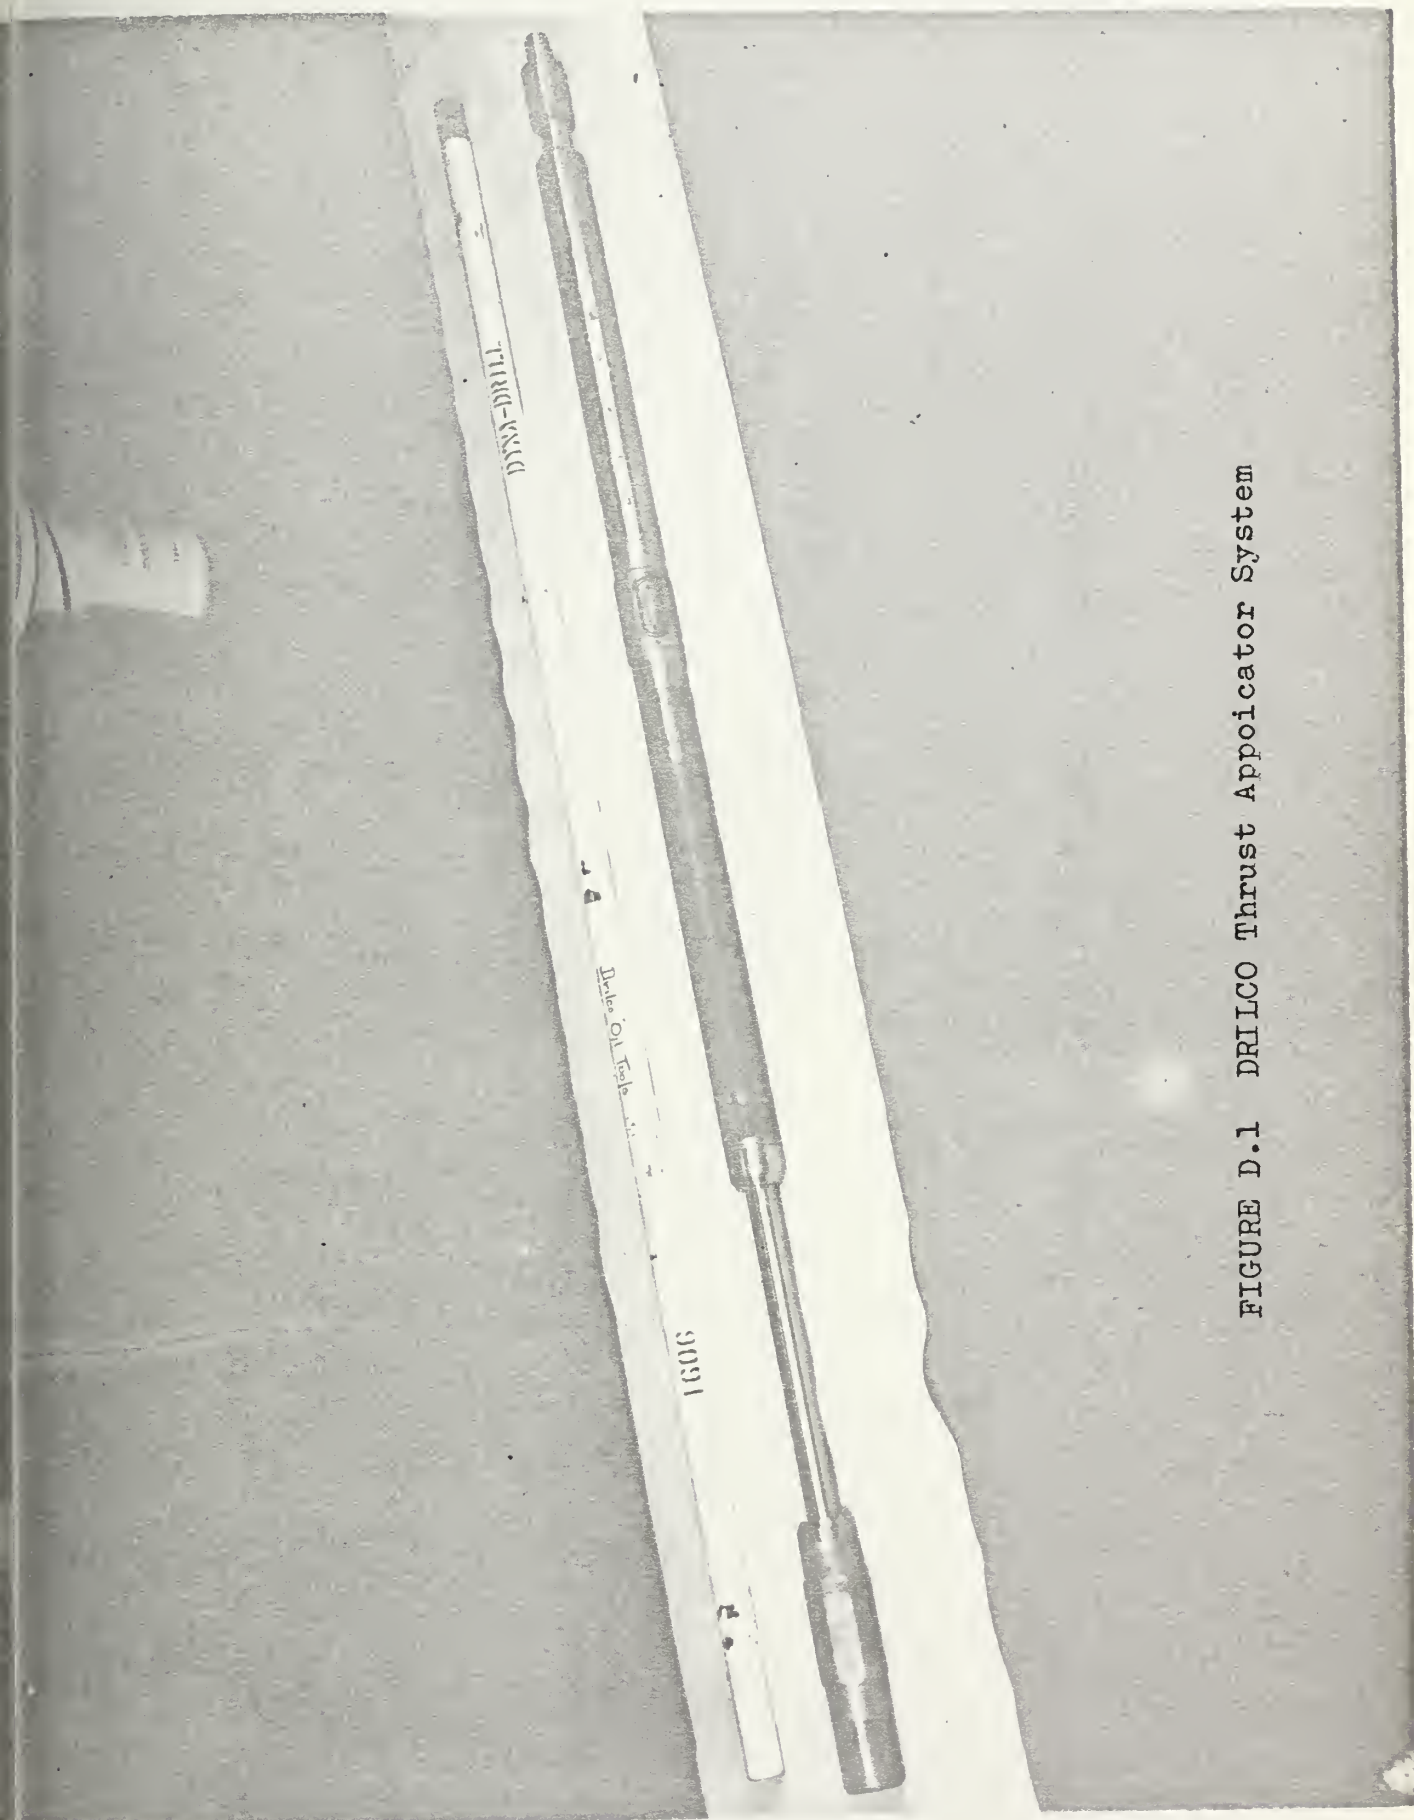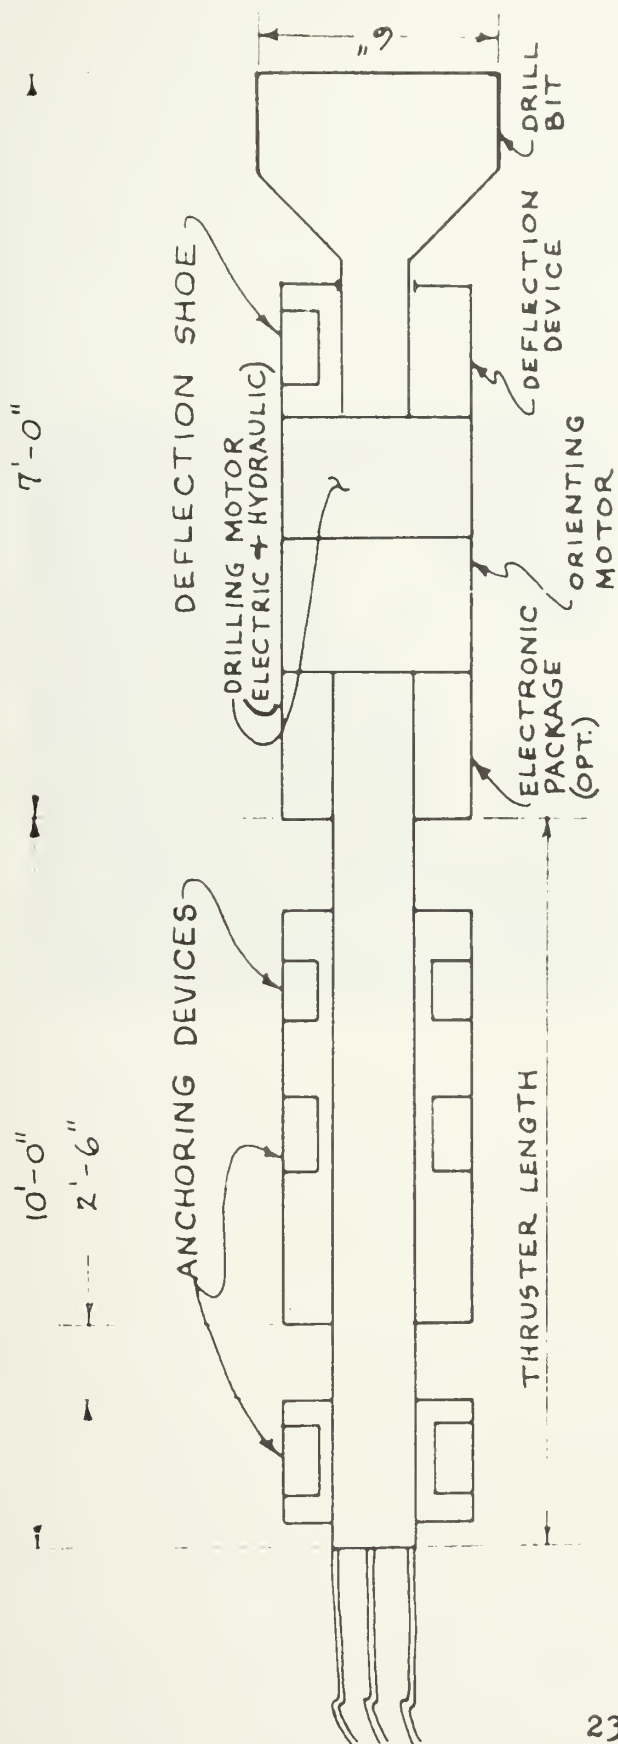
FIGURE D.1 DRILCO Thrust Appoicator System

236

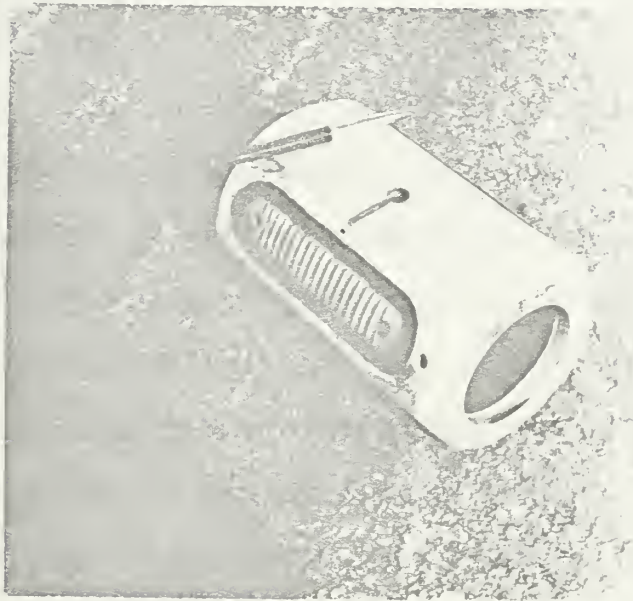FIGURE D.2 Schematic of Thrust Applicator

237

FIGURE D.3 DRILCO Anchor Pad

238

units can be attached to the thruster in the cylinder anchor section, while at the present time only one set of anchor pads can be attached at the piston anchor section.

In order to prevent rotation, there is a splime between the extension piston rod and anchor cylinder section.

The operation sequence of this thruster is as follows: (1) pressure is applied to the cylinder anchors, securing them to the drill hole wall; (2) pressure is then applied to the "out-hole" piston which moves the piston rod forward, thereby providing forward thrust to the drilling motor as it advances in the hole (the advance is limited by the stroke of the device); (3) at the end of the stroke the cylinder must be reset, therefore the piston rod anchors are set against the drill hole wall; (4) next pressure is released from the cylinder anchors which retract; (5) pressure is then applied to the "in-hole" side of the piston, forcing the cylinder toward the bit one stroke length. The thruster is then in position for another stroke. The hydraulic power unit is designed so that the resetting operation is done automatically in 15-20 seconds (Kellner, 1974).

The auxillary equipment located on the surface for this thrust applicator include 3-5 hoses which

are attached to the rear of the device, a 5 H.P.
hydraulic power unit, and a means for powering the
drilling motor which can be either hydraulic (water
or mud) downhole motor, modified hydraulic motor, or
an electric motor. Figure D.4 illustrates the sur-
face equipment setup and required operating personnel.
This picture was taken at the DRILCO test site in
Midland, Texas.

Presently, DRILCO has the ability and experience
to produce a thrust applicator which would be more
compatible to soft ground operation than the current
models. Future research and development for DRILCO
in this area will obviously be a function of the
market's demand for this thrust applicator.

Table D.1 lists the important specifications for
the thrust applicator.

Table D.1 DRILCO Thrust Applicator

O.D. (in)	Length (ft)	Stroke (in)	Weight (lb)	Hole Size (in)
2-3/4	7.6	18	80	3-1/8
5-3/4	10.6	30	200	6

The primary user of this thrust applicator has
been the Continental Oil Company(CONOCO). As a
result of their research program, a deflection shoe
and orientating motor have been developed and

FIGURE D.4   Operational Test of
DRILCO Thrust Appoicator

successfully tested in combination with the thrust applicator.

The deflection shoe and orientating motor are shown in their respective locations in Figure D.2. The deflection shoe serves two purposes: (1) directional control device which applies a lateral force on the bit, (2) correction device for precession of the thruster. The function of the deflection shoe as a directional control device is thoroughly explained in Chapter 3. The function of the deflection shoe as a correction device for precession results from the thruster inherently precessing $1/2^{\circ}$ per stroke because of splime error (Edmond, 1975). The deflection shoe is fully extended under 600 psi($4140kN/m^2$) and requires a constant pressure of 220 psi($1518 kN/m^2$) to maintain a constant elevation on a horizontal drill path.

The orientating motor is hydraulically operated in two basic modes. The first mode is a slow pulse which orients the deflection and a pulsated signal to correct for precession. The orientating motor initially rolls at 7° increments which then settles back to a total angular change of 4° where it positively locks into position.

One of the most significant improvements to the thrust applicator made by CONOCO has been the

reduction of hydraulic lines from 5 to 3 by adding a downhole valving system. The valving system is a set of hydraulic control valves with one control valve for the thruster and the other one for the orientating motor-deflection shoe circuit. Both of these systems vent the fluid to the annulus, thereby completing the open hydraulic system. A future development will be to have a completely closed hydraulic system which would mean having only one hose for the slurry line with a control line or hose within this slurry hose for control of the closed hydraulic system. The total resistance due to the normal weight friction component will then be decreased, thereby increasing the operational distance of the thrust applicator.

CONOCO has been able to drill a 6 in(15.2 cm) diameter hole 1000 ft(305 m) horizontally in soft coal. They have also been able to use three cylinder anchor sets and operate in 1 tsf($96kN/m^2$) soft coal using the 5-3/4 in(14.6 cm) O.D. thrust applicator.

D.3   NURAT

NURAT is an acronym for Newcastle University Root Analogue Tunneller. This particular device was the result of research performed by Dr. D. Hettiaratchi, lecturer in the Department of

Agricultural Engineering at The University of
Newcastle Upon Tyne, Newcastle Upon Tyne, England.
No detailed information could be released by the
sponsoring agency, British Gas Corporation, as a re-
sult of patents pending.

The device is not only a thruster, but also
penetrates the soil with its cone-shaped front piece.
The principle of operation for NURAT is based on
Dr. Hettiaratchi's research of the mechanism
associated with root penetration in dense soil.
"The tunnel is formed by expansion of a hole from
zero radius (Hettiaratchi, 1974)." As the anchor
pads are extended radially outward, stress relief
occurs at the tip of the device, thus allowing it to
penetrate out ahead of the main body, compacting the
soil around the cone.

The prototype of NURAT is approximately 3.3 ft
(1 m) long and creates a hole about 6 in(15 cm) in
diameter. The penetration rate of this prototype
device was about 20 ft(6 m) per hour. There was no
directional control device for the NURAT prototype.

The production development and future research
programs involving NURAT have been passed on to the
British Gas Corporation. The present developmental
work being conducted by the British Gas Corporation

is geared to meet the following general design
specifications (Spearman, 1974), stated in Table D.2.

Table D.2   Design Specifications for NURAT

O.D. (in)	Length (ft)	Weight	Power Source	Rate of Penetration	Comments
6	5	Capable of being handled by two persons	Mobile Hydraulic Power Pack	60 ft/hr in sand or clay	Should have ability to reverse direction

D.4   U.S. NAVY POLYTOROIDAL TUNNELING THRUSTER

The Naval Civil Engineering Laboratory at
Port Hueneme, California conducted a feasibility
study of vermiculating or wormlike motion as applied
to a thrust device. The objective of this study was
to determine the feasibility of a polytoroidal
tunneling thruster concept, especially its applica-
tion as a thrust device for penetrating rock, clay,
or sand in combination with a drilling motor or direct
displacement method of penetration. High thrust was
developed by using large contact surfaces while axial
movement was provided by means of a vermiculating
motion. Vermiculation is "a motion in which a longi-
tudinal wave traverses a contacting surface in the
direction of translation (Williams and Gaberson,
1973)."

The basic idea for a polytoroidal tunneling thruster evolved from careful study of the tunnel boring machines. It was noted that these devices lacked the versatility to operate in both hard rock and soft ground. Therefore, the theory behind the polytoroidal tunneler applies large contact surfaces, using low operating pressures, in order to provide a high thrust capability. The model used to test this theory is shown in Figure D.5.

The toroids squeeze against the tunnel wall and remain in position due to the frictional characteristics of the soil media. The thrust provided by each toroid was calculated using, $P=\pi Dwp\mu$, where D is the toroid diameter, w is the surface contact width, p is the inflation pressure, and μ is the coefficient of friction of the soil. This is the same relationship as the Mohr-Coulomb failure criteria (i.e. $\tau_{ff}=\bar{\sigma}_1 \tan\bar{\phi}$) for cohesionless soils. If both sides of the Mohr-Coulomb equation were divided by the contact area, then the resulting force would be maximum thrust available from the thrust device.

The operation of the polytoroidal thruster is illustrated in Figure D.6. In step (a) the most forward toroid is deflated, in step (b) the device has advanced one step because the forward bag expended simultaneously while the after bag deflated.

Sleeve

Slots

Fixed Toroids

Movable Toroids

FIGURE D.5   U.S. Navy Polytoroidal Tunneling
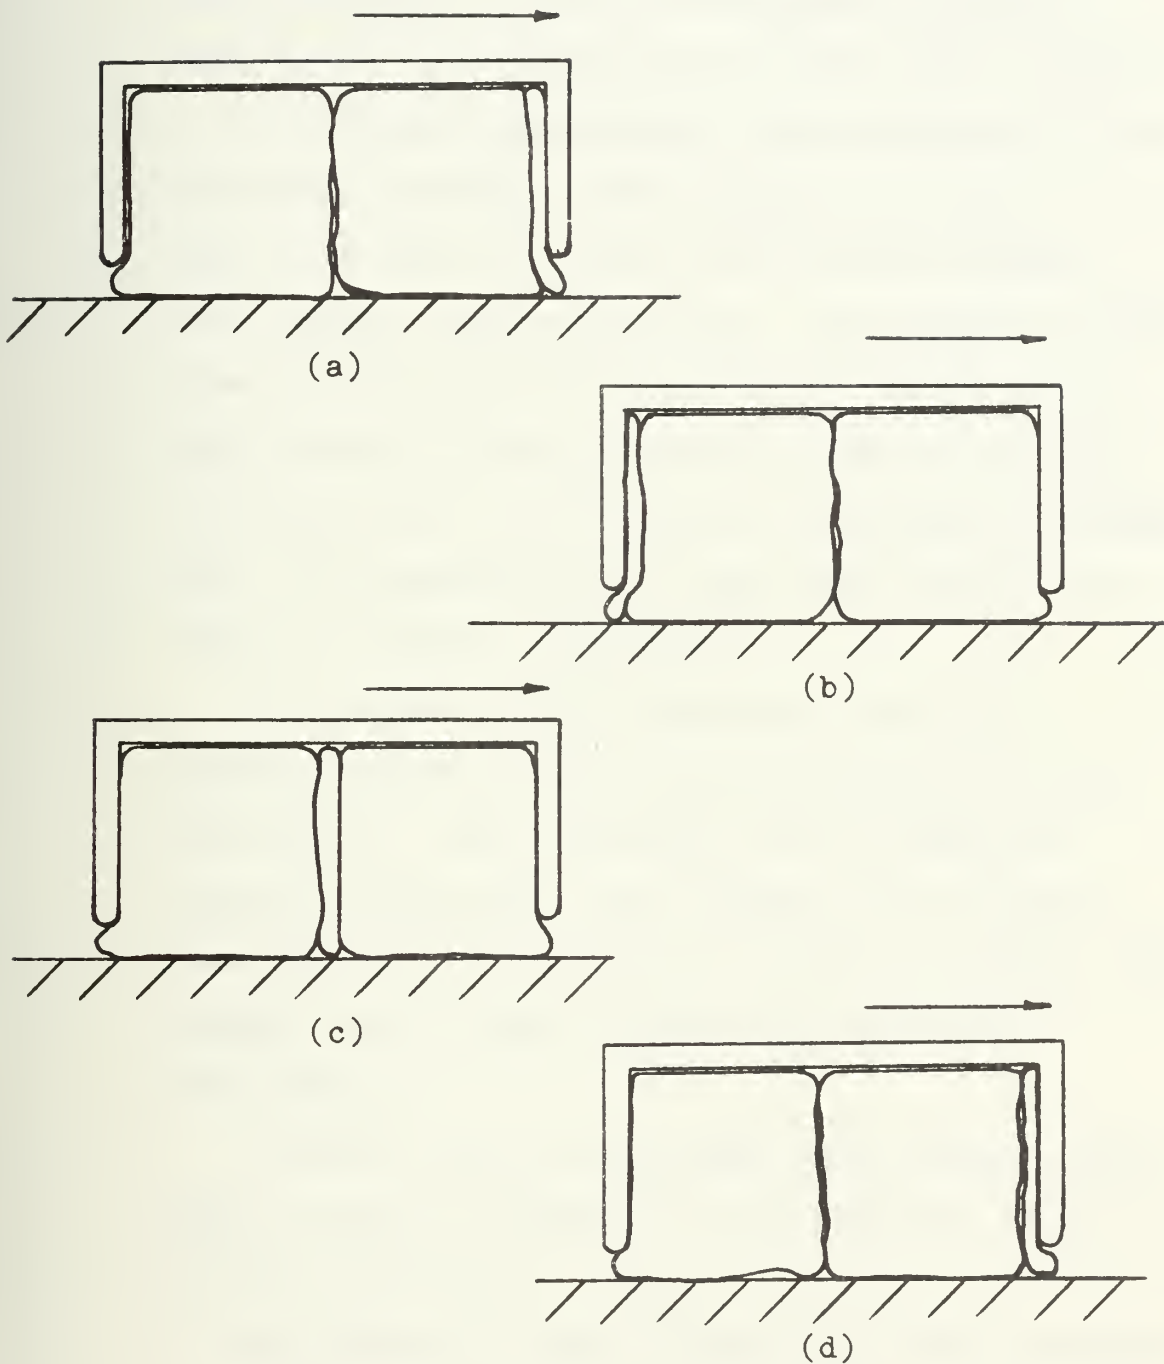Thruster (After U.S. Navy, 1973)

247

FIGURE D.6 Operational Sequence of
the Polytoroidal Thruster
(After U.S. Navy, 1973)

248

In step (c) the middle bag deflated while the after bag was inflating. Finally, in step (d) the forward bag is deflated. This then completes the cycle. With each step described the thruster moves forward.

Preliminary experimental tests verified that the theory was feasible. These results initiated a search for material to make the toroids stronger, more durable, and more flexible. The internal working pressure was set at 10-50 psi(69-315 kN/m^2) while other design criteria included a cyclic inflating/deflating life of 10000 cycles, low weight-to-strength ratio, low permeability to gases, and a high resistance to an adverse environment.

The result of this industrial search for a suitable toroid concluded that bladders had to be custom made. "The technology and the materials required to fabricate such bladders are available commercially (Pal and Gaberson, 1974)." However, the purchase cost of these bladders was considered noneconomical.

A second test was performed using bicycle inner tubes as shown in Figure D.5 The model was able to lift 600 lb(272 kg).

The results of their feasibility study indicated that the polytoroidal tunneler is a very reasonable method of applying thrust to a downhole motor.

For example, an 8 ft(2.4 m) device was axially tested with a thrust of 55000 lb(540 N) with an air pressure of 50 psi. However, due to the high cost for developing this device, the Naval Civil Engineering Laboratory was unable to continue its research for this project.

D.5 WORM

WORM is an acronym for Wheel-less Orthogonal Reaction Motor which is a downhole drilling system as shown in Figure D.7 and was invented by William Still from Aerospace Industrial Associates, Incorporated. This design approach solves two major and costly problems in drilling horizontally at long distances. First, like the previous thrusters, it provides a constant force at the bit, independent of the distance along the drill hole, and secondly it provides adequate maneuverability and orientation within the system so that it can function continuously without stopping for a survey (Still, 1975).

Presently, the WORM is still in the embryonic stages of development and the principle of operation has only been tested with a small model. No prototype has been built or tested in a subsurface environment, to the best of the author's knowledge.
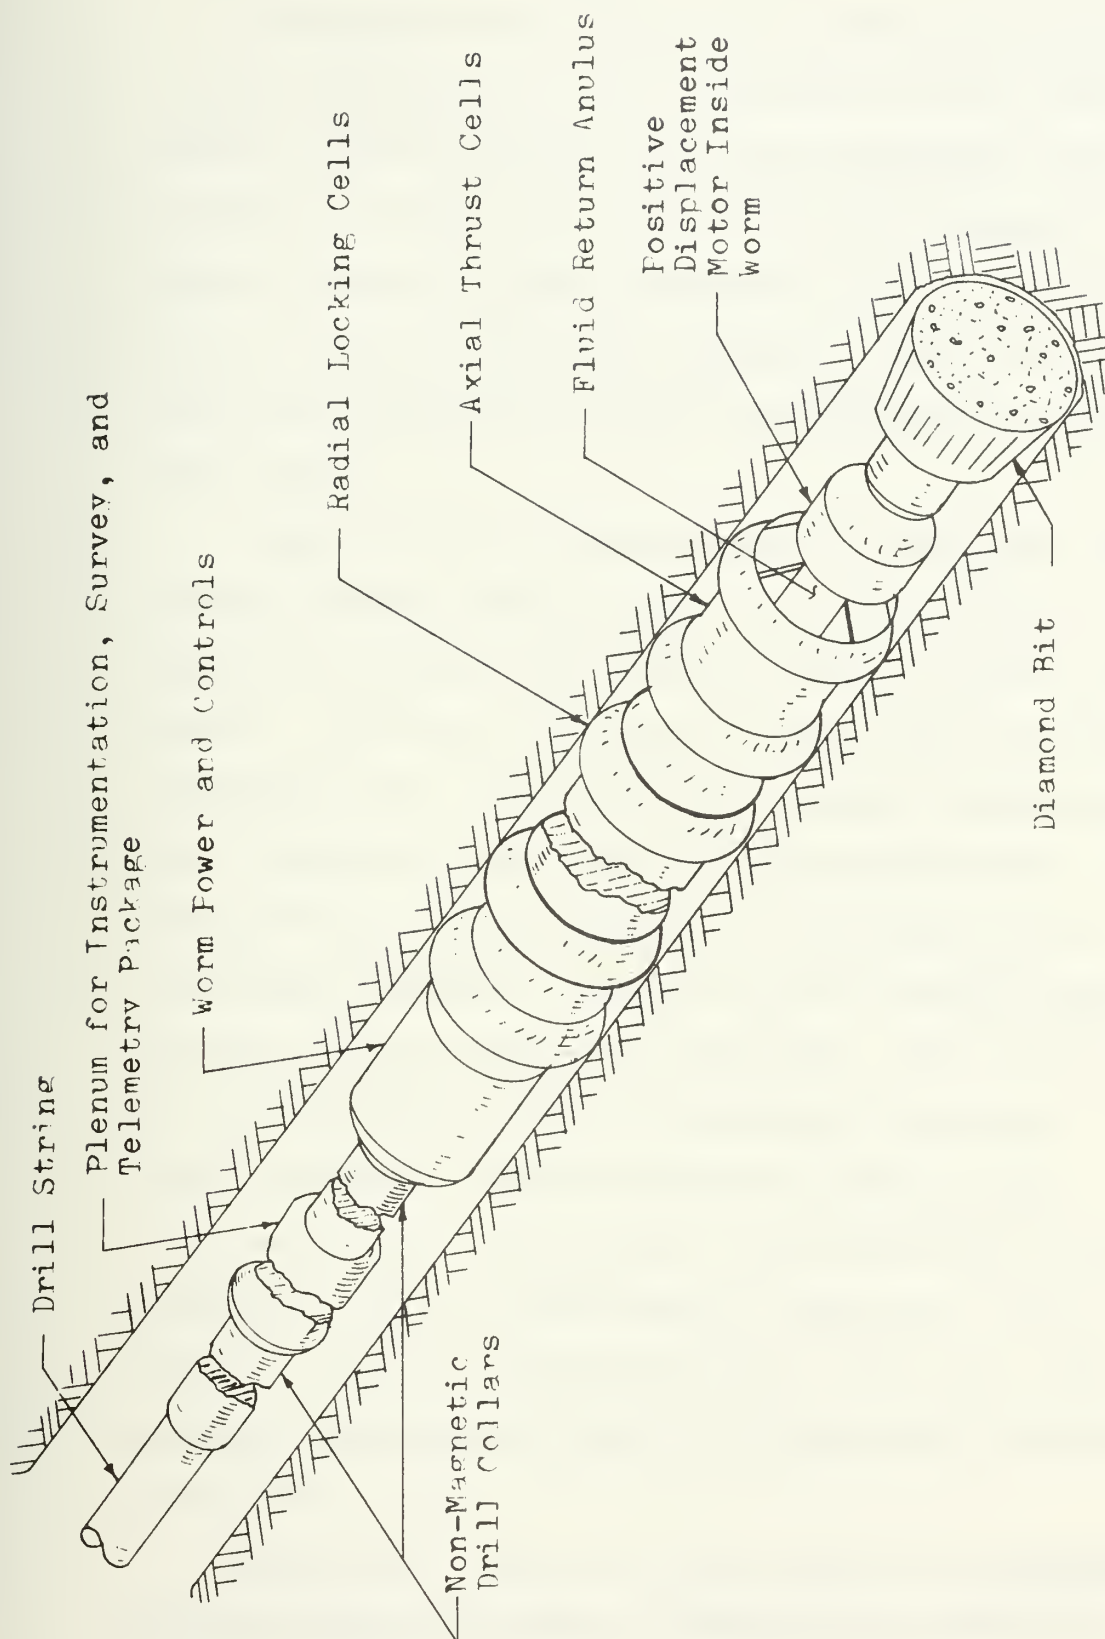
Drill String

Plenum for Instrumentation, Survey, and Telemetry Package

Worm Power and Controls

Radial Locking Cells

Axial Thrust Cells

Fluid Return Anulus

Positive Displacement Motor Inside Worm

Diamond Bit

Non-Magnetic Drill Collars

FIGURE D.7 WORM^{TM} (After Still, 1975)

251

The major design difference between the WORM and a thrust applicator is the replacement of the conventional individual anchor pads with elastomeric cells, as shown in Figure D.7. This then is an advanced form of the same concept presented in the section on the U.S. Navy Polytoroidal Tunneler. The locomotion principle applied here is the vermiculating or worm-like motion.

Figure D.8 is an explanation of exactly how WORM propells itself down the hole. The cells shown in Figure D.8 are what the inventor calls, "vector force cells." There are two types of these cells, an axial and radial cell. The axial cell expands and applies force parallel to the axis of the borehole with insignificant radial expansion. The radial cells then expand radially outward from the borehole axis to provide contact surface for anchoring. The choice of an elastomer for the cell material allows for cyclic expansion without excessive damage to the drill hole wall. In addition, the properties of the elastomer, such as high abrasion resistance, high strength, and its incompressability, make it a very desirable material for use in a subterranean environment (Still, 1975).

Directional control of this device is accomplished by controlling the degree of parallelism between the
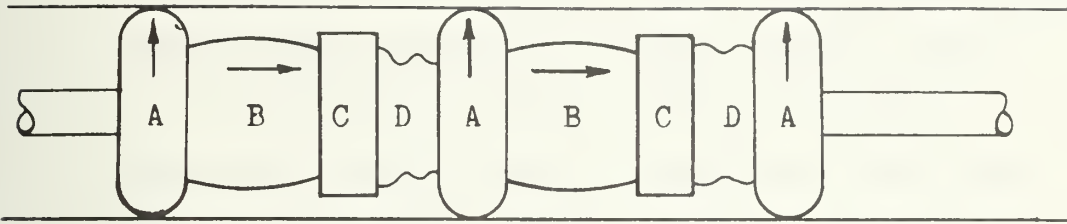
"A" Expands, locking drill string at these points
"B" Expands, forcing "C" to right and compressing "D"
"C" & "D" have been released from that shown in 3 below
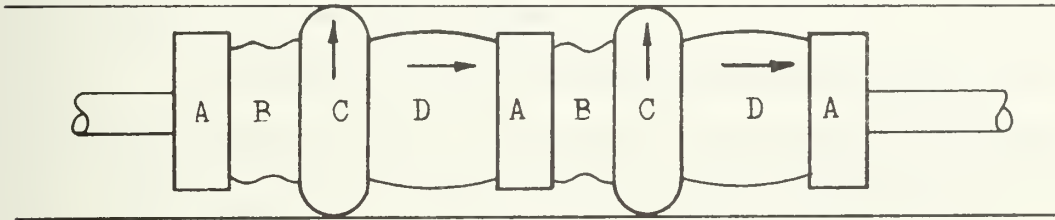
"C" Expands, locking drill string at these points through
     "B" & "D"
"A" & "B" are released and "D" espands forcing "C" and
     "A" apart
"A" is attached to drill string, "C" is not. "C" is
     locked to wall of drill hole. Thus "A" forces drill
     string to right
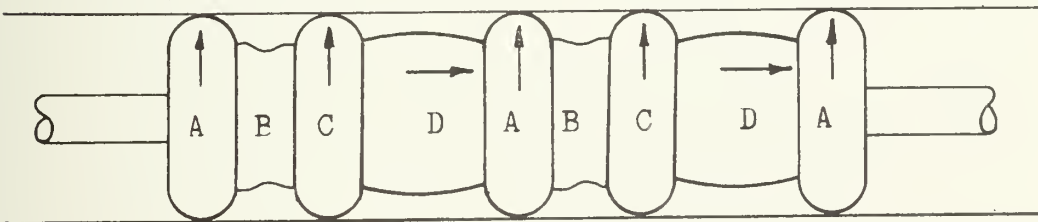
"A" Expands, relocking drill string at new point cycles,
     then repeats to 1 above.

Note: Single action, which provides one thrust per cycle
       is the simplest; other actions which provide
       smooth power flow have been derived.

FIGURE D.8 Operational Sequence of the WORM (After
           Still, 1975)

various muscle units. "A controlled lack of parallelism will force the WORM body to swing into an arc of fixed radius of curvature (Still, 1975)."

The WORM, as shown in Figure D.7 has a hydraulic drilling motor to power the drill bit. Also shown in this figure, directly behind the motor, are annulus openings for the drilling fluid to return through the WORM unit and exit out the up hole end of the body to provide lubricity within the drill hole for the drill pipe.

The WORM concept has many positive aspects to it, however since it has not been built as a proto-type and field tested, it was not considered in the final equipment design.

APPENDIX E

DIMENSIONLESS ANALYSIS CALCULATIONS

E.1   INTRODUCTION

A review of the literature and several
communications with key personnel in the horizontal
directionally controlled drilling industry revealed
that no system of comparison or correlation existed
for the various drilling systems available.
One major reason given for this state was that the
variability of each drilling situation does not lend
itself to a simple dimensionless ratio. Another
reason was the difficulty in developing a set of
parameters that, first would be meaningful, and
second, be practical. Therefore, the selection of
comparative parameters was tempered by the dual
requirement of applicability in a variety of geo-
logical conditions and simple practicality.

Of the four parameters presented, three are
dimensionless while the fourth one has units which
are not significant for comparison. The dimension-
less ratios are the shearing parameter, jetting
parameter, and the fluid system parameter.

255

The dimensional parameter is the drill motor parameter.

Each of these parameters will be presented separately along with the logic of their derivation and the criteria necessary to evaluate a system with them. In addition, a sample calculation will be followed by a table which includes all of the values for the four systems selected. The reasons for evaluating these particular four systems are explained in Chapter 4.

E.2   SHEARING PARAMETER

The shearing parameter has been developed to indicate some measure of the torque required to fail the soil at the outer edge of the bit face, in relation to the torque that is available from a particular motor with a specific size drill bit. The torque required to shear the soil was derived from the cylindrical torque equation with the maximum torque resulting at the bit-drill hole wall interface.

$$T = \frac{\tau_{max}}{r} J$$

$\tau_{max} = S_u =$ undrained shear strength of the soil
  $r =$ radius at the bit-soil interface
$J = \frac{\tau d^4}{32} =$ polar moment of inertia

The resulting parameter is:

$$SP = \frac{\frac{S_u(J)}{r}}{T} = \frac{S_u \frac{\pi d^3}{16}}{T}$$

Two different undrained shear strengths were adopted
for these calculations. An $S_u=0.25$ tsf (soft clay)
is the best condition for shearing because of its low
resistive shear strength while conversely, an
$S_u=2.0$ tsf (stiff clay) is the worst soft ground
condition with respect to shearing at the outer edge
of a bit face.

The following is a sample calculation for a
2-3/8 in(6 cm) Dyna-Drill motor in a 4-1/2 in
(11.4 cm) hole.

$$S_u=500psf$$
$$d=4\text{-}1/2 \text{ in}=0.375 \text{ ft}$$
$$Torque=30 \text{ ft-lb}$$

$$S.P. = \frac{S_u \frac{\pi d^3}{16}}{T} = \frac{500 \pi (0.375)^3}{16(30)} = 0.173$$

The criteria established to evaluate the
shearing parameter is that, if the ratio is less than
one, the drill motor and bit will be able to shear

the soil from a dead start. A value greater than one
does not mean that the motor/bit combination will not
be able to drill in that specific soil, but instead
that if the drilling operation depended solely on
the shear ability of the system at the soil-bit
interface, then the system could not drill.

Table E.1 indicates the various values for the
shearing parameter for each system considered in the
final equipment design.

Table E.1 Shearing Parameters

Drill System	System Torque (ft-lb)	Shearing Parameter	
		S_u=500 psf	S_u=4000 psf
2-3/8 in O.D. Dyna-Drill 4-1/2 in hole	30	0.173	1.38
6-1/2 in O.D. Dyna-Drill 12 in hole	467	0.21	1.68
5 in O.D. Hydraulic Motor 7 in hole	175	0.111	0.89
3-11/16 in O.D. Electric Motor 7 in hole	175 @ 150 RPM	0.111	0.89

E.3 JETTING PARAMETER

One of the most important considerations to account for when selecting a drilling system to bore a hole in soft ground is, whether, in fact, the soil in front of the bit is being eroded under a high velocity stream of drilling fluid from the bit orifice. Some degree of jetting is desirable in order to increase the efficiency of the drill bit, however, an excess of jetting will create a large cavity in front of the bit as explained in Chapter 3.

The jetting parameter(JP) represents the velocity of a fluid to cause erosion of a particular soil in comparison to the jet stream velocity emitting from the bit orifice, or $JP=V_e (448.8)/GPM/A_{B.O.}$ The erosion velocity has been taken for water and not drilling mud since no data was available for mud slurry. Therefore, the erosion velocity is probably lower than it would be for a drilling mud. Another important assumption is the jet stream flows directly from the orifice to the borehole face. This is a conservative assumption, since the flow pattern is in reality a vortex and the vortex flow would increase the erosion effect at the bit face.

The erosion velocity data was found for a sand-gravel soil and a clay soil. The value adopted for the erosion of sand was taken from Leet and Judsen

(1971), Figure 11.16. The erosion velocity in this figure is for turbulent flow in a stream for a 7mm diameter particle and equal to 9.84 ft/sec(3.0m/sec). Several reasons for using this value include: (1) there were no values available in the literature for the critical erosion velocity in sand (i.e. that required for initial movement of a particle of sand at the soil-liquid interface; (2) the actual flow within the bit face is, in fact, turbulent; and (3) the 7 mm diameter size particle is an average particle diameter for compacted, cemented sands. A value for the erosion velocity in clay was calculated and empirically derived in the literature. An empirical average value was taken from Graf (1971) and equal to 4.69 ft/sec(1.43 m/sec).

A sample calculation of the parameter follows:

For sand $V_e = 9.84$ ft/sec

For a 7 in Tricone bit with a bit orifice diameter of 13/32 in:

$$\text{Orifice Area} = \frac{\pi d^2}{4} = \frac{\pi (13/32)^2}{4(144)} = 0.0009 \text{ ft}^2$$

$$JP = \frac{V_e(448.8)}{\frac{GPM}{A_{B.O.}}} = \frac{9.84(448.8)}{\frac{30}{0.0009}} = 0.132$$

The criteria used to evaluate this ratio is that
if the velocity required for erosion is greater than
the bit orifice velocity ($JP > 1$), no erosion at the
bit face occurs. Therefore, the smaller JP is the
more erosion occurs in front of the bit.

To date there is no maximum limit to how small
this number can be before detrimental jetting of a
cavity occurs in the area surrounding the bit.
However, this parameter can be used to evaluate the
relative effects of jetting between various bit/motor/
flow rate combinations for different soil environments.

Table E.2 presents the results of the jetting
parameter for the various bit sizes considered in the
equipment designs. The diamond bit is not included
because it does not have orifices but instead has
fluid passages.

Table E.2   Jetting Parameter

Bit Type	O.D. (in)	GPM	Orifice Dia (in)	Orifice Area (ft^2)	JP	
					Sand	Clay
Tricone	7	30	13/32	0.0009	0.132	0.063
	12	325	5/8	0.0021	0.029	0.014
Drag	4-1/2	25	5/16	0.000533	0.094	0.045

E.4   DRILL MOTOR PARAMETER

The two previously discussed parameters have
been dimensionless and have dealt with the geological
aspects of drilling in soft ground. We will now turn
our attention to the drill motor parameter which will
deal with the equipment characteristics of each
drilling motor. The parameter is not dimensionless,
however, the dimensions that do result from this
ratio are not meaningful to the analysis. What is
meaningful, is that the horsepower output of the
motor with respect to the size (i.e. volume) of the
motor, is compared to the torque output. Therefore,
the drill motor parameter(DMP)=H.P.(550)/Vol/Torque.

A more meaningful parameter for evaluating
different motors in various soil conditions was pre-
sented by Dr. Neville G. W. Cook at the Third Congress
of the International Society for Rock Mechanics
(Cook and Harvey, 1974). Dr. Cook evaluated the
efficiency of excavating in rock in terms of the
specific energy of rockbreaking and the specific
power, that is the power that can be delivered to a
unit area of the working face. The specific energy is
the energy consumption per unit volume of the original
solid rock that was broken. The specific energy is a
function of the type and condition of the rock, the
strength, and the size of broken particles. Dr. Cook

and his associates had done previous studies to
determine these values for different size particles.
The relationship adopted here is R=3600P/S where P
is the power delivered to the working face per unit
area, S is the specific energy for the method used,
and R is the rate of penetration along the tunnel
axis. Therefore, each system was compared on the
basis of its rate of penetration.

This type of comparison would have been adopted
to this thesis, however, the specific energies of
various soils are unknown. This then is the reason
for adopting the drill motor parameter in the form
DMP=H.P.$(550)/V_m$/Torque.

The following sample calculation is for a
2-3/8 in(6 cm) O.D. Dyna-Drill.

$$\text{Output H.P.}=6$$

$$\text{Vol}=\frac{\pi d^2 (L)}{4} \quad \text{where } L=7 \text{ ft}$$

$$\text{Vol}=\frac{\pi (2.375)}{4(144)}(7) = 0.215 \text{ ft}^3$$

$$\text{Torque}=30 \text{ ft-lb}$$

$$\text{DMP}= \frac{6(550)}{0.215(30)} = 511.6$$

The evaluation criteria for this parameter is
one which considers the smallest value of DMP to be
the most efficient use of the volume of the motor for
the rated design power and torque outputs.

Table E.3 lists the results of DMP calculations
for the four proposed equipment designs.

Table E.3   Drill Motor Parameter

	H.P.	Volume (ft^3)	Torque (ft-lb)	DMP $(1/ft^3\text{-sec})$
2-3/8 in O.D. Dyna-Drill	6	0.215	30	511.60
6-1/2 in O.D. Dyna-Drill	28	4.52	467	7.30
5 in O.D. Hydraulic Motor	10	0.79	175	39.78
3-11/16 in O.D. Electric Motor & Gear Box @ 150 RPM	5	0.348	175	45.2

E.5   FLUID SYSTEM PARAMETER

The final parameter relates the annular pressure
in the drill hole to the hydraulic fracture gradient
of the formation being drilled. The annular pressure
is the hydraulic pressure required at the bit to push
the drilling fluid back up and out of the hole.
A convenient method used to express this pressure in
mud weight is the equivalent circulating density
which is completely explained in Chapter 3 and
Appendix B. The hydraulic fracturing gradient for
this parameter has been taken from the thesis work
performed by Hedberg (1975). Therefore, the final
form of the fluid system parameter(FSP) is

ECD/Hyd. Frac. Grad.

The purpose of this parameter is to objectively calculate whether, in fact, the soil formation will fracture in the direction of the minor principle stress, resulting in loss of circulation of the drilling fluid.

A simple calculation of the FSP for a 2-3/8 in (6 cm) O.D. Dyna-Drill is as follows:

$$ECD = 1.21 \text{ g/cm}^3 \text{ (@ 100 ft depth)}$$
$$\text{Hyd. Frac. Grad.} = \frac{1.6 \text{ g/cm}^3 \quad @ \text{ clay}}{1.5 \text{ g/cm}^3 \quad @ \text{ sand}} \text{ (Hedberg, 1975)}$$
$$FSP = \frac{ECD}{HFG} = \frac{1.21}{1.6} = 0.76 \text{ @ clay below the water table}$$

The criteria for evaluating this parameter is such that the ECD is not greater than the hydraulic fracture gradient. If the ECD is greater, then loss of circulation occurs which could result in the drilling system becoming stuck in the hole.

Table E.4 lists all of the values of FSP for the various systems considered.

Table E.4 Fluid System Parameter

Motor Type	ECD (g/cm^3)	Fracture Gradient (g/cm^3)		FSP			
		Clay	Sand	Clay		Sand	
				Depth			
				100	500	100	500
$2\frac{3}{8}$ in O.D. Dyna-Drill	1.3	1.6	1.5	0.76	0.91	0.81	0.97
$6\frac{1}{2}$ in O.D. Dyna-Drill	1.12	1.6	1.5	0.73	0.88	0.78	0.94
$3\frac{11}{16}$ in O.D. Hydraulic Motor	1.13	1.6	1.5	0.73	0.89	0.78	0.95
Note: The electric motor was not considered because it only requires a minimum flow rate and pressure for cooling and voiding drill fluid from the drill hole.							